

# ENCLOSED DOL MOTOR STARTERS


## Features & Benefits:

- UL508A Type E combination starters
- Pre-wired control circuit for quick and easy field installation
- DOL – Direct-On-Line, Non-reversing
- Single & Three-phase 208V, 230V, & 480V input voltage
- SS Outdoor enclosure rated, Non-Corrosive
- Ready to go even in the harshest environments
- Mechanical reset standard
- Start bottom pilot light



Model available 1/2HP to 75HP.

## BUILD YOUR OWN PART NUMBER

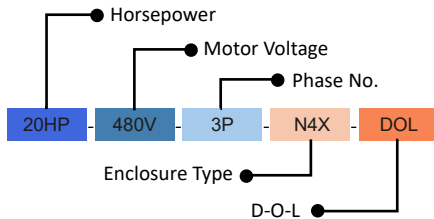

### 120 Vac, Single Phase

| Max. UL Ratings |            | Current Trip Range (Amps) | Part Number<br>D-O-L    |
|-----------------|------------|---------------------------|-------------------------|
| Power (HP)      | FLA (Amps) |                           |                         |
| 1/2             | 9.8        | 7.0 - 10                  | 1/2HP-120V-1P-N4X-DOL   |
| 3/4             | 13.8       | 10 - 15                   | 3/4HP-120V-1P-N4X-DOL   |
| 1               | 16         | 11 - 17                   | 1HP-120V-1P-N4X-DOL     |
| 1 1/2           | 20         | 15 - 23                   | 1 1/2HP-120V-1P-N4X-DOL |
| 2               | 24         | 23 - 32                   | 2HP-120V-1P-N4X-DOL     |
| 3               | 34         | 25 - 40                   | 3HP-120V-1P-N4X-DOL     |
| 5               | 56         | 40 - 57                   | 5HP-120V-1P-N4X-DOL     |

### 240 Vac, Single Phase

| Max. UL Ratings |            | Current Trip Range (Amps) | Part Number<br>D-O-L    |
|-----------------|------------|---------------------------|-------------------------|
| Power (HP)      | FLA (Amps) |                           |                         |
| 1/2             | 4.9        | 4.0 - 6.3                 | 1/2HP-240V-1P-N4X-DOL   |
| 3/4             | 6.9        | 5.6 - 8                   | 3/4HP-240V-1P-N4X-DOL   |
| 1               | 8          | 5.6 - 8                   | 1HP-240V-1P-N4X-DOL     |
| 1 1/2           | 10         | 7 - 10                    | 1 1/2HP-240V-1P-N4X-DOL |
| 2               | 12         | 8 - 12.5                  | 2HP-240V-1P-N4X-DOL     |
| 3               | 17         | 11 - 17                   | 3HP-240V-1P-N4X-DOL     |
| 5               | 28         | 23 - 32                   | 5HP-240V-1P-N4X-DOL     |

### 208/240 Vac, Three Phase

| Max. UL Ratings |            | Current Trip Range (Amps) | Part Number<br>D-O-L    |
|-----------------|------------|---------------------------|-------------------------|
| Power (HP)      | FLA (Amps) |                           |                         |
| 1/2             | 2.4/2.2    | 1.8 - 2.8                 | 1/2HP-240V-3P-N4X-DOL   |
| 3/4             | 3.5/3.3    | 2.8 - 4                   | 3/4HP-240V-3P-N4X-DOL   |
| 1               | 4.6/4.2    | 4 - 6.3                   | 1HP-240V-3P-N4X-DOL     |
| 2               | 7.5/6.8    | 5.6 - 8                   | 2HP-240V-3P-N4X-DOL     |
| 3               | 10.6/9.6   | 7 - 10                    | 3HP-240V-3P-N4X-DOL     |
| 5               | 16.7/15.2  | 11 - 17                   | 5HP-240V-3P-N4X-DOL     |
| 7 1/2           | 24.2/22    | 15 - 23                   | 7 1/2HP-240V-3P-N4X-DOL |
| 10              | 30.8/28    | 25 - 40                   | 10HP-240V-3P-N4X-DOL    |
| 15              | 46.2/42    | 32 - 50                   | 15HP-240V-3P-N4X-DOL    |
| 20              | 59.4/54    | 40 - 57                   | 20HP-240V-3P-N4X-DOL    |
| 30              | 88/80      | 63 - 80                   | 30HP-240V-3P-N4X-DOL    |

### 460/480 Vac, Three Phase

| Max. UL Ratings |            | Current Trip Range (Amps) | Part Number<br>D-O-L    |
|-----------------|------------|---------------------------|-------------------------|
| Power (HP)      | FLA (Amps) |                           |                         |
| 1/2             | 1.1        | 0.8 - 1.2                 | 1/2HP-480V-3P-N4X-DOL   |
| 1               | 2.1        | 1.8 - 2.8                 | 1HP-480V-3P-N4X-DOL     |
| 2               | 3.4        | 2.8 - 4                   | 2HP-480V-3P-N4X-DOL     |
| 3               | 4.8        | 4 - 6.3                   | 3HP-480V-3P-N4X-DOL     |
| 5               | 7.6        | 5.6 - 8.0                 | 5HP-480V-3P-N4X-DOL     |
| 7 1/2           | 11         | 8.0 - 12.5                | 7 1/2HP-480V-3P-N4X-DOL |
| 10              | 14         | 10 - 15                   | 10HP-480V-3P-N4X-DOL    |
| 15              | 21         | 15 - 23                   | 15HP-480V-3P-N4X-DOL    |
| 20              | 27         | 25 - 40                   | 20HP-480V-3P-N4X-DOL    |
| 30              | 40         | 25 - 40                   | 30HP-480V-3P-N4X-DOL    |
| 40              | 52         | 40 - 57                   | 40HP-480V-3P-N4X-DOL    |
| 50              | 65         | 57 - 70                   | 50HP-480V-3P-N4X-DOL    |
| 60              | 77         | 63 - 80                   | 60HP-480V-3P-N4X-DOL    |
| 75              | 96         | 75 - 97                   | 75HP-480V-3P-N4X-DOL    |

## Questions

REXO Controls also customize electrical panels to meet the specific requirements of your applications. Contact REXO Controls Technical Support @ 1.832.438.5252

