


INDUSTRIAL GAS BOOSTER | PROFESSIONAL

MODEL	Model GB-15-REX
SERIES	<p>GB-Series</p> <p>Single Stage - Single Acting</p> <p>The most economical and is ideal for applications not requiring much volume. Nitrogen, Oxygen, Argon, Helium, Hydrogen and more.</p>



PERFORMANCE CHART

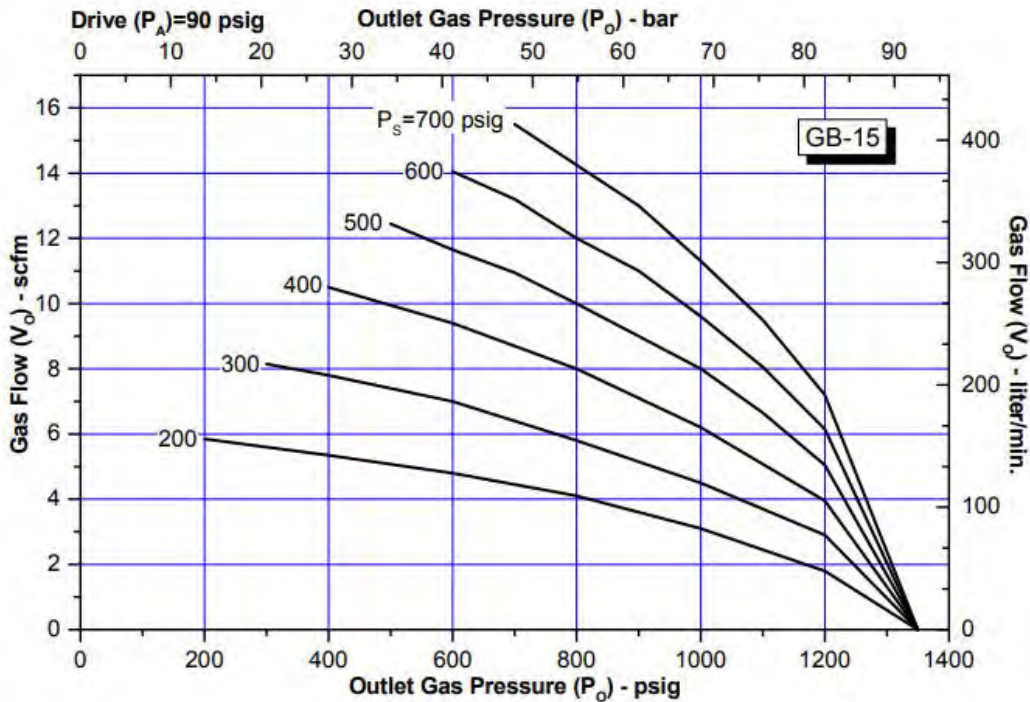

COMFORTABLE		MAX. RATED OPERATIONAL	
Output Pressure	1300 (89 bar)	Max. Output Pressure	2250 (155 bar)
Gas Input	50 - 700 Psi	Max. Gas Input	700 - 2250 Psi
Volume Per Stroke	7.5 in ³	Volume Per Stroke	7.5 in ³
Flow	100 - 400 LPM	Flow	400 LPM
Air Operate	60 - 90 psi (6 bar)	Air Operate	100 - 120 psi (7 bar)
Max. Air Consumption	72-scfm		

Refer to gas booster performance curve for operating pressures

CONSTRUCTION & GASES

Variety Gases	Nitrogen, Oxygen, Argon, Helium, Hydrogen and more.
Pump Brand	SC-Hydraulic Engineering
Made In	USA
Components	Parker, McDaniel, Spir Star & Swagelok
Frame	Steel painted frame (Painted Blue) + Stainless steel Control Panel
Dimensions & Weight	22" L x 17" H x 13"W - 90 lbs

FEATURES

- Infinitely variable output pressure and flow
- Will hold static pressure without generating heat or consuming power
- Standard models are suitable for various gases
- Well proven and trouble-free operation
- Designed for ease of maintenance
- Low cost servicing
- Robust construction

CONNECTIONS

Gas Inlet	1/4" NPT Female
Gas Outlet	1/4" NPT Female
Air Inlet	3/8" NPT Female
Pressure Hoses	3000 Psi - 3/8" JIC Swivel Nuts - 20ft

PUMP ON MODEL GB-REX - DRAWING

