
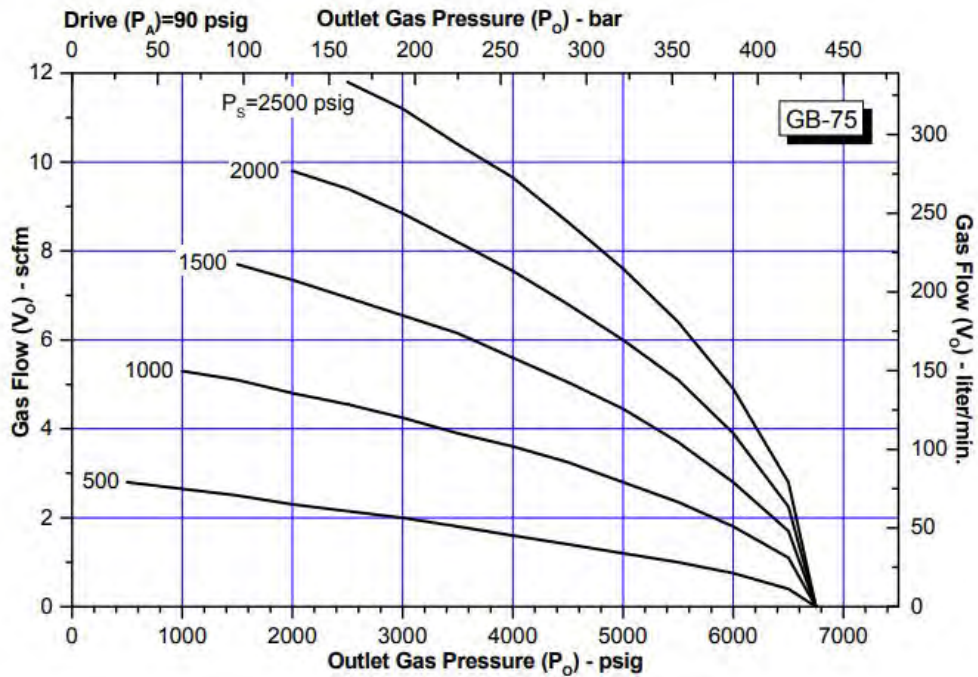


INDUSTRIAL GAS BOOSTER | PROFESSIONAL

MODEL	Model GB-75-REX	
SERIES	GB-Series Single Stage - Single Acting The most economical and is ideal for applications not requiring much volume. Nitrogen, Oxygen, Argon, Helium, Hydrogen and more.	

PERFORMANCE CHART



COMFORTABLE		MAX. RATED OPERATIONAL	
Output Pressure	6800 (467 bar)	Max. Output Pressure	11250 (775bar)
Gas Input	250 - 2500 Psi	Max. Gas Input	2500 - 6000 Psi
Volume Per Stroke	2.1 in ³	Volume Per Stroke	2.1 in ³
Flow	50 - 300 LPM	Flow	400 LPM
Air Operate	60 - 90 psi (6 bar)	Air Operate	100 - 120 psi (7 bar)
Max. Air Consumption	72-scfm		

Refer to gas booster performance curve for operating pressures

CONSTRUCTION & GASES

Variety Gases	Nitrogen, Oxygen, Argon, Helium, Hydrogen and more.
Pump Brand	SC-Hydraulic Engineering
Made In	USA
Components	Parker, McDaniel, Spir Star & Swagelok
Frame	Steel painted frame (Painted Blue) + Stainless steel Control Panel
Dimensions & Weight	22" L x 17" H x 13"W - 90 lbs

FEATURES

- Infinitely variable output pressure and flow
- Will hold static pressure without generating heat or consuming power
- Standard models are suitable for various gases
- Well proven and trouble-free operation
- Designed for ease of maintenance
- Low cost servicing
- Robust construction

CONNECTIONS

Gas Inlet	1/4" NPT Female
Gas Outlet	1/4" NPT Female
Air Inlet	3/8" NPT Female
Pressure Hoses	10000 Psi - 3/8" JIC Swivel Nuts - 20ft

PUMP ON MODEL GB-REX - DRAWING

