


INDUSTRIAL GAS BOOSTER | PROFESSIONAL

MODEL	Model GBD-D30-REX
SERIES	<p>GBD-D-Series</p> <p>Double Acting - Double Head</p> <p>Has the same characteristics of the standard GBD however the double head allows half the input pressure to achieve the same outlet pressure</p> <p>Nitrogen, Argon, Helium, Hydrogen and more.</p>



PERFORMANCE CHART

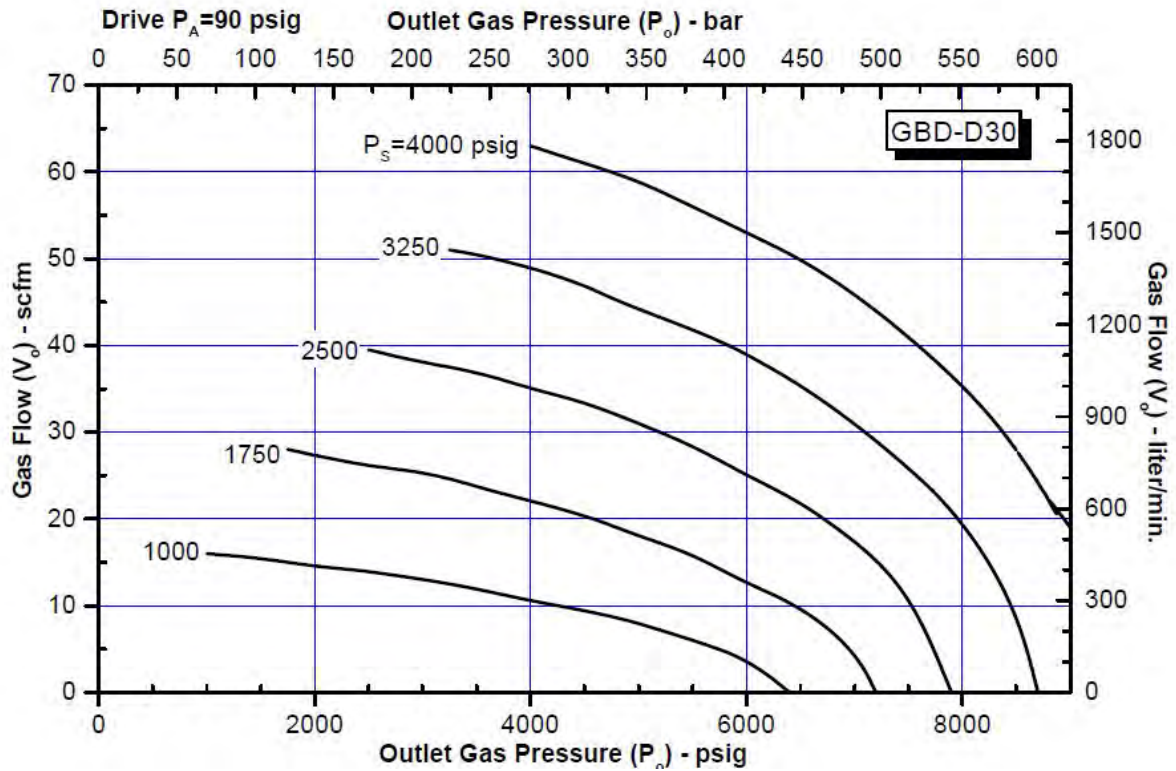

COMFORTABLE

Output Pressure	8000 (551 bar)
Gas Input	1000 - 2500 Psi
Volume Per Stroke	6.3 in ³
Flow	300- 1000 LPM
Air Operate	60 - 90 psi (6 bar)
Max. Air Consumption	72-scfm

MAX. RATED OPERATIONAL

Max. Output Pressure	9000 (620 bar)
Max. Gas Input	2500 - 6000 Psi
Volume Per Stroke	6.3 in ³
Flow	1000 LPM
Air Operate	100 - 120 psi (7 bar)

Refer to gas booster performance curve for operating pressures

CONSTRUCTION & GASES

Variety Gases	Nitrogen, Argon, Helium, Hydrogen and more.
Pump Brand	SC-Hydraulic Engineering
Made In	USA
Components	Parker, McDaniel, Spir Star & Swagelok
Frame	Steel painted frame (Painted Blue) + Stainless steel Control Panel
Dimensions & Weight	29" L x 17" H x 14"W - 100 lbs

FEATURES

- Infinitely variable output pressure and flow
- Will hold static pressure without generating heat or consuming power
- Standard models are suitable for various gases
- Well proven and trouble-free operation
- Designed for ease of maintenance
- Low cost servicing
- Robust construction

CONNECTIONS

Gas Inlet	1/4" NPT Female
Gas Outlet	1/4" NPT Female
Air Inlet	3/8" NPT Female
Pressure Hoses	10000 Psi - 3/8" JIC Swivel Nuts - 20ft

PUMP ON MODEL GB-REX - DRAWING

