

INDUSTRIAL GAS BOOSTER | PROFESSIONAL

MODEL

Model GBT-D15/30-REX

SERIES


GBT-D Series

Two Stage - Double Head

Has same characteristics of the standard GBT however the double allows half the input pressure to achieve the same outlet pressure
Nitrogen, Argon, Helium, Hydrogen and more.



PERFORMANCE CHART

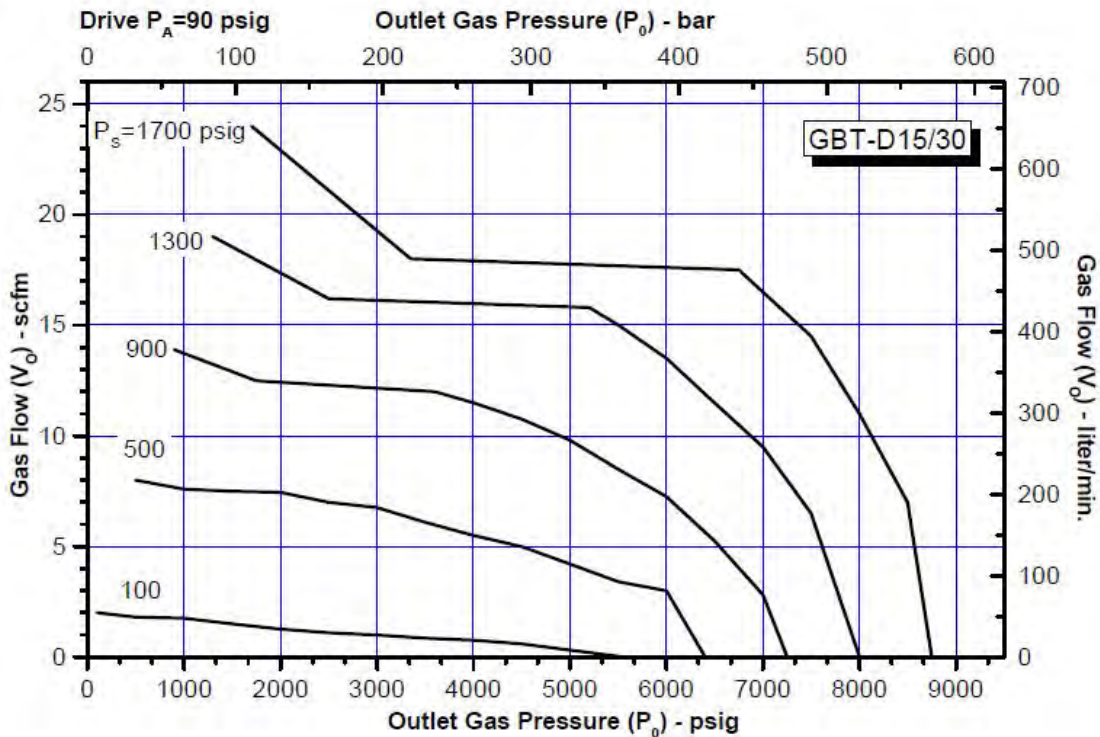

COMFORTABLE

Output Pressure	8800 (606 bar)
Gas Input	100 - 1700 Psi
Volume Per Stroke	7.5 in ³
Flow	100 - 700 LPM
Air Operate	60 - 90 psi (6 bar)
Max. Air Consumption	72-scfm

Refer to gas booster performance curve for operating pressures

CONSTRUCTION & GASES

Variety Gases	Nitrogen, Argon, Helium, Hydrogen and more.
Pump Brand	SC-Hydraulic Engineering
Made In	USA
Components	Parker, McDaniel, Spir Star & Swagelok
Frame	Steel painted frame (Painted Blue) + Stainless steel Control Panel
Dimensions & Weight	29" L x 17" H x 14"W - 100 lbs

FEATURES

- Infinitely variable output pressure and flow
- Will hold static pressure without generating heat or consuming power
- Standard models are suitable for various gases
- Well proven and trouble-free operation
- Designed for ease of maintenance
- Low cost servicing
- Robust construction

CONNECTIONS

Gas Inlet	1/4" NPT Female
Gas Outlet	1/4" NPT Female
Air Inlet	3/8" NPT Female
Pressure Hoses	10000 - 1/4" JIC Swivel Nuts - 20ft

PUMP ON MODEL GB-REX - DRAWING

