



## TECHNICAL DATA SHEET


PRODUCT	<b>HYDROSTATIC TEST EQUIPMENT</b>
MODEL	<b>D1-306REX</b>
SERIES	<b>SERIE D1-REX</b>



Air operated liquid system, lightweight portable, economic, safety, durable and easy to operate made in USA with highest quality components for low operational cost. D1-326REX equipment are available for use on a wide range of fluids including water, oil/hydraulic and other solubles. D1-306REX are used in most industries including Oil & Gas.

### FEATURES/BENEFITS

- Designed for easy maintenance
- Made with USA highest quality components/solid rubber tires
- All tubing and fittings are stainless steel 316
- Ports: Air supply 3/8" NPT, liquid inlet 1/2" NPT, discharge 1/4" HP.
- Unit weight: 100 pounds    Dimensions: : 28"L x 48"H x 20"W

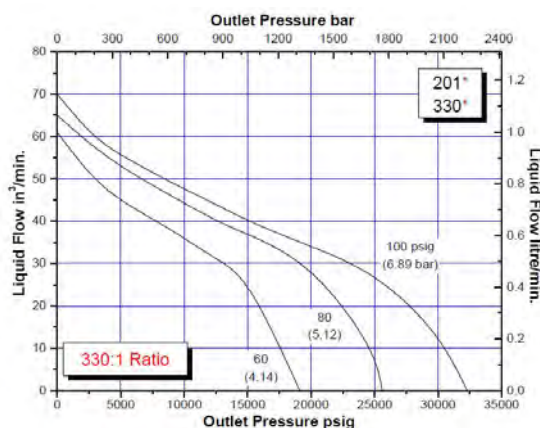

### SPECIFICATIONS

Output Flow	.15 GPM (.60 LPM)
Max Output Pressure	30,000 psi (2068 bar)
Air Supply	100 Psi
Inlet	1/2" female NPT
Outlet	1/4" female HP
Pump	SC-Hydraulic Ratio 330:1

### GENERAL PRODUCT INFORMATION

- When operating from 0 to rated hydraulic pressure, air consumption will be approximately 24-56 scfm of free air at 100 psi output. At lower air pressures and higher hydraulic pressures air consumption will be reduced proportionately to flow rates indicated.
- The D1-REX Series "Dry Lube" pump does not require an air line lubricator.
- Contact Hydrorex for pressure gauges calibration / certificate.
- Maintenance parts for future repairs, all components and accessories can be found on our website [www.hydrorex.com](http://www.hydrorex.com)

