



TECHNICAL DATA SHEET


PRODUCT	HYDROSTATIC TEST EQUIPMENT
MODEL	D1-404REX
SERIES	SERIE D1-REX



Air operated liquid system, lightweight portable, economic, safety, durable and easy to operate made in USA with highest quality components for low operational cost. D1-326REX equipment are available for use on a wide range of fluids including water, oil/hydraulic and other solubles. D1-326REX are used in most industries including Oil & Gas.

FEATURES/BENEFITS

- Designed for easy maintenance
- Made with USA highest quality components/solid rubber tires
- All tubing and fittings are stainless steel 316
- Ports: Air supply 3/8" NPT, liquid inlet 1/2" NPT, discharge 1/4" HP.
- Unit weight: 100 pounds Dimensions: : 28"L x 48"H x 20"W

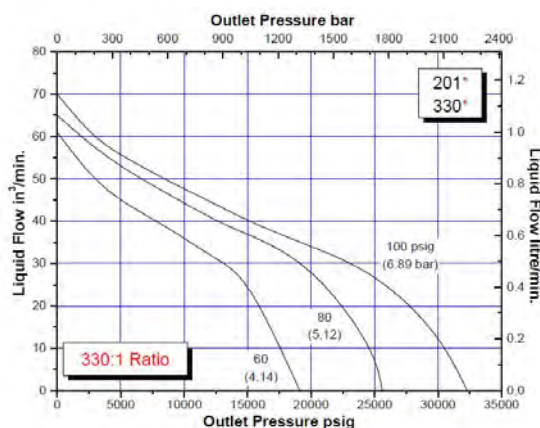

SPECIFICATIONS

Output Flow	.10 GPM (.40 LPM)
Max Output Pressure	40,000 psi (2757bar)
Air Supply	100 Psi
Inlet	1/2" female NPT
Outlet	1/4" female HP
Pump	SC-Hydraulic Ratio 330:1

GENERAL PRODUCT INFORMATION

- When operating from 0 to rated hydraulic pressure, air consumption will be approximately 24-56 scfm of free air at 100 psi output. At lower air pressures and higher hydraulic pressures air consumption will be reduced proportionately to flow rates indicated.
- The D1-REX Series "Dry Lube" pump does not require an air line lubricator.
- Contact Hydrorex for pressure gauges calibration / certificate.
- Maintenance parts for future repairs, all components and accessories can be found on our website www.hydrorex.com

