



ORDER YOUR PUMP NOW:

Online Store [www.pressureshop.com](http://www.pressureshop.com) - [sales@hydrorex.com](mailto:sales@hydrorex.com) - Call: 832.277.1182

## **SC HYDRAULIC ENGINEERING CORPORATION**

Designers and Manufacturers of Hydraulic and Pneumatic Equipment Since 1953

# 10-5 SERIES AIR OPERATED LIQUID PUMPS



P  
U  
M  
P  
S

# NO OTHER PUMPS OFFER ALL THESE ADVANTAGES

**Simple operating principle** – SC air operated hydraulic pumps operate on the simple but efficient principle of pressure intensification through the use of differential areas. Fulfilling Boyle's Law, a larger air-driven piston delivers pressure to a proportionally lesser diameter hydraulic piston, providing fluid flow at relatively higher pressures.

**High output capacity** and outstanding performance provided at very low cost.

**Guaranteed performance** – All SC Hydraulic pumps will give years of low cost, trouble free service when properly installed and maintained to manufacturer's instruction.

**Wide range of operating pressures** is provided by all models. For example, the D5000B55 operates efficiently when delivering from 400 to 5800 psi (see D5 Series specifications).

**Wide range of output capacities** – Only 100 psi air pressure is required for all models to attain maximum rate of flow (see performance charts for data).

**Complete flexibility** – SC Hydraulic pumps adapt to a wide variety of applications, from simple manual controls to fully automatic operation. Air motors are interchangeable for most models within each series.

**Automatic restart** – Whenever an SC Hydraulic pump is idle, the pilot valve is designed to re-position the pump on the power stroke for the next cycle of operation.

**Smooth operation** – The air piston actuating valve is precision fit to close tolerances for maximum efficiency and long service life.

**Both pressure and volume of flow** are easily and accurately controlled by a pressure regulator installed in the air supply line.

**Fluid Compatibility** – Pumps can operate with almost any type fluid service (specify when ordering).

**Hydraulic cylinders** are constructed from aluminum-bronze, stainless steel, or carbon steel.

**Hydraulic pistons** are constructed from stainless steel, hard chrome-plated.

**Materials incorporated** in the hydraulic assembly vary depending upon type of service and pump model.

**Designed for easy maintenance** – Costly down time is reduced to a minimum when service is required. "D" Dry Lube Series pumps are packed at the factory with valve lubricant and may be operated without a lubricator in air supply. Hydraulic cylinder packing may be replaced without dismantling the air motor.


**10-5/10-5L Series • 16 models • to 55,000 psi**

**Applications include** static and burst testing, flow testing requiring relatively low flows at high pressures, operation of hydraulic presses, clamping, pressing, metal forming, piercing, blanking, staking, etc. Applications requiring extreme intermittent pressure and velocity commonly associated with water blasting and jetting.




# 10-5 & 10-5L SERIES

10-5 & 10-5L Series pumps have a 5 ½" diameter air piston and a 1 ¼" stroke. Sixteen models are available with pressures up to 55,000 psig.

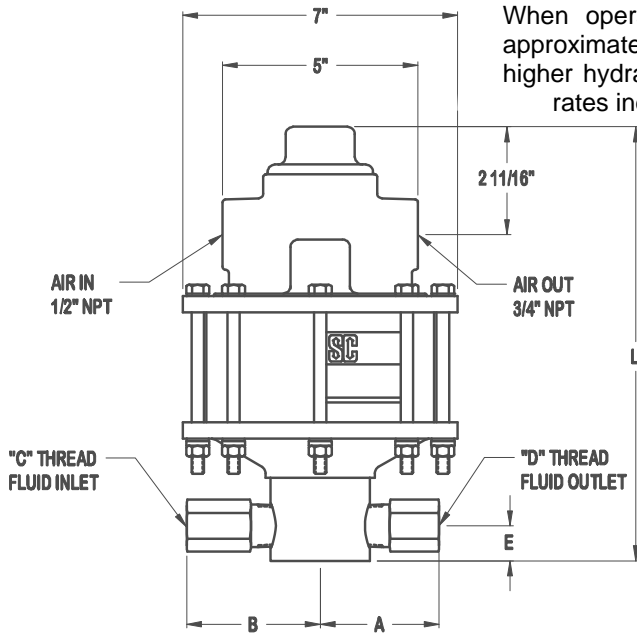

When operating from 0 to rated hydraulic pressure, air consumption will be approximately 28 scfm of free air at 100 psi output. At lower air pressures and higher hydraulic pressures air consumption will be reduced proportionately to flow rates indicated.

Mounting may be in any position, vertical preferred. When mounting in an inverted position, a drain cock should be provided to drain off any liquid that may accumulate in the pilot valve air chamber.



The 10-5 series "Non lube" and 10-5L series "Lube" pumps are identical except the 10-5 series is pre-lubricated at factory and therefore does not require a lubricator in the air drive supply line. The 10-5L series "Lube" pump part number requires the addition of the letter "L" as a suffix to denote the pump requires a lubricator in the air drive supply line.

## Mounting Dimensions in Inches

Pressure Ratio	10-5 & 10-5L Series Model	L	A	B	NPT/HF4 (Std)		SAE/HF4 (Optional)		E	F	G
					C Thread	D Thread	C Thread	D Thread			
5	-003	13.125	3.500	4.750	1"	1/2"	-	-10 SAE	1.125	2.375	3.125
10 thru 20	-005 thru -010	12.313	3.000	4.000	1"	1/2"	-	-10 SAE	1.000	1.750	2.500
25 thru 105	-015 thru -060	10.875	3.000	3.375	1/2"	1/2"	-10 SAE	-10 SAE	0.875	1.750	2.500
140 thru 440	-080 thru -250	11.250	2.500	2.313	3/8"	3/8"	-	9/16-18 *	0.875	1.750	2.500
555	-350	11.188	3.750	2.313	3/8"	9/16-18 *	-	-	.0875	1.750	2.500

\*Coned and Threaded High Pressure Connection for ¼" O.D. Tubing







## Measurements & Approximate Air to Hydraulic Pressure Ratios – Static Conditions

Pressure Ratio	10-5 & 10-5L Series Model	Hydraulic Piston Diameter (in)	Hydraulic Piston Area (in <sup>2</sup> )	Volume per Stroke (in <sup>3</sup> )	Air Pressure (PSI)									
					10	20	30	40	50	60	70	80	90	100
5	-003	2.3750	4.430	5.540	30	75	130	175	220	270	320	370	415	465
10	-005	1.6250	2.070	2.590	80	180	285	385	490	590	690	795	900	1000
12	-007	1.5000	1.770	2.210	90	200	340	450	560	700	850	980	1100	1225
20	-010	1.1875	1.110	1.390	145	330	525	700	925	1100	1300	1500	1700	1900
25	-015	1.0000	0.785	0.981	200	475	750	1000	1300	1550	1800	2000	2350	2625
30	-018	0.9375	0.689	0.861	225	525	875	1150	1500	1775	2050	2350	2700	3075
35	-020	0.8750	0.601	0.751	250	600	1000	1400	1775	2125	2475	2825	3200	3625
55	-030	0.6875	0.371	0.464	400	1000	1700	2200	2900	3400	4000	4600	5200	5800
70	-040	0.6250	0.307	0.384	500	1175	1950	2600	3350	4100	4900	5600	6350	7000
85	-045	0.5625	0.248	0.310	800	1700	2600	3400	4400	5100	6000	6900	7800	8600
105	-060	0.5000	0.196	0.245	900	2000	3150	4200	5400	6400	7450	8500	9700	10700
140	-080	0.4375	0.150	0.188	1100	2400	3900	5400	6900	8300	9800	11200	12600	14000
195	-100	0.3750	0.110	0.138	1400	3250	5250	7250	9250	11250	13250	15000	17000	18750
280	-160	0.3125	0.077	0.096	2250	4000	7750	10500	13500	16250	18750	21500	24500	27500
440**	-250**	0.2500	0.049	0.061	5000	8000	12500	16500	21000	25500	30000	34000	38000	42500
555**	-350**	0.2187	0.038	0.048	6250	12500	18750	25000	31250	37500	43750	47500	51250	55000

\*\* Recommended for continuous duty at pressures up to 30,000 psi. Intermittent duty above 30,000 psi.







# 10-5 & 10-5L SERIES

## APPROXIMATE RATE OF DISCHARGE

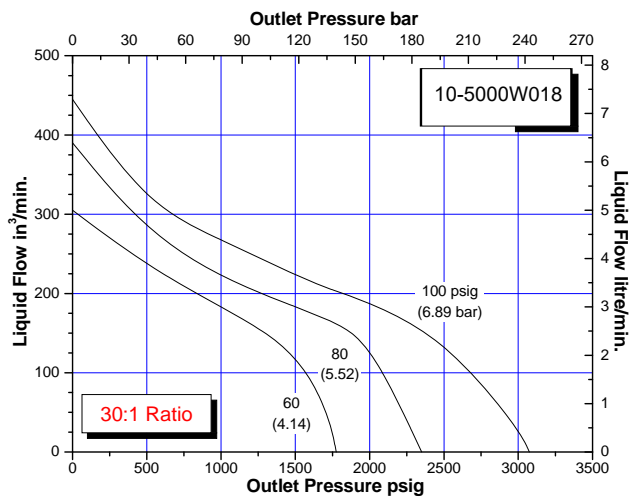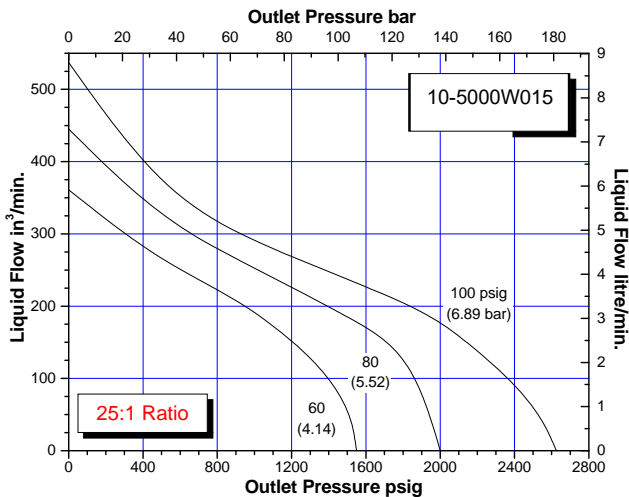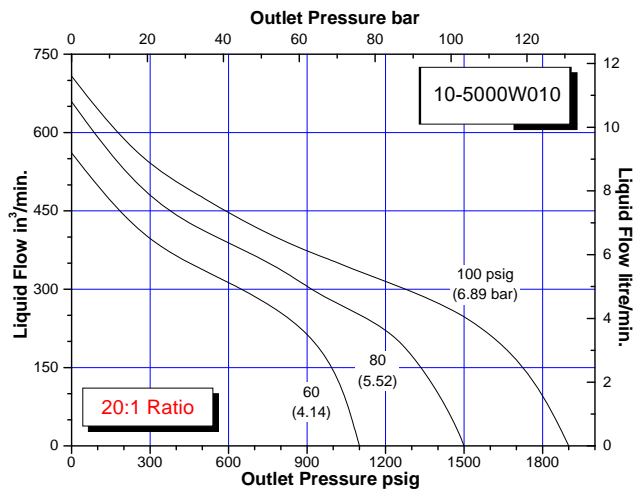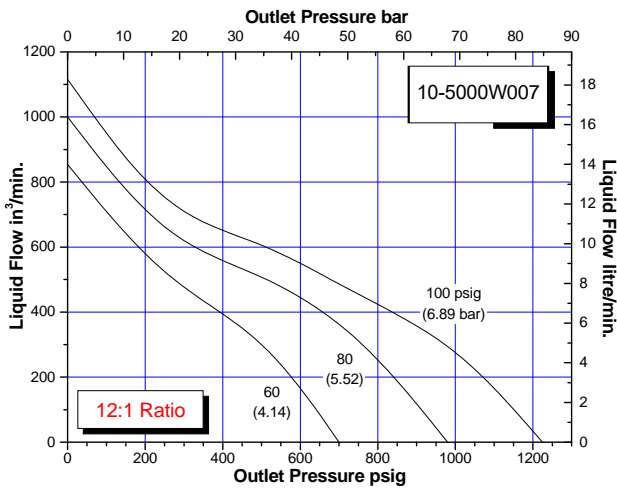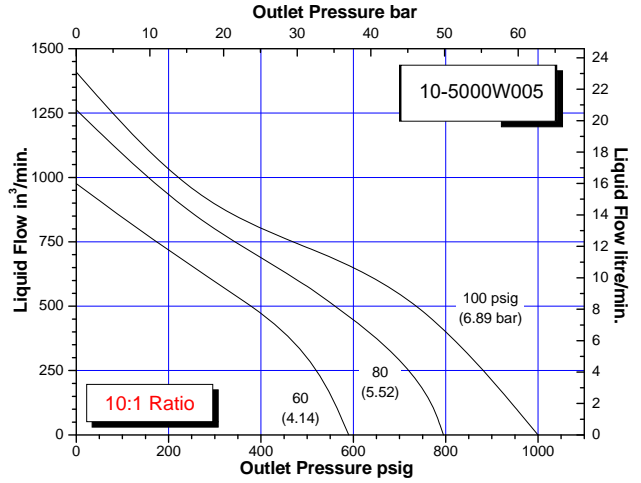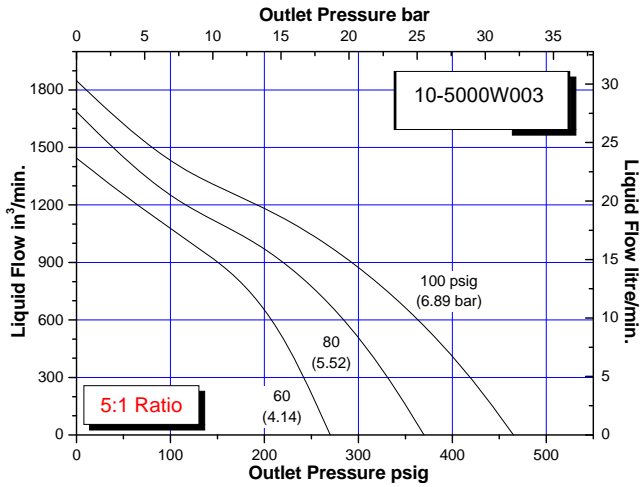





# 10-5 & 10-5L SERIES

## APPROXIMATE RATE OF DISCHARGE

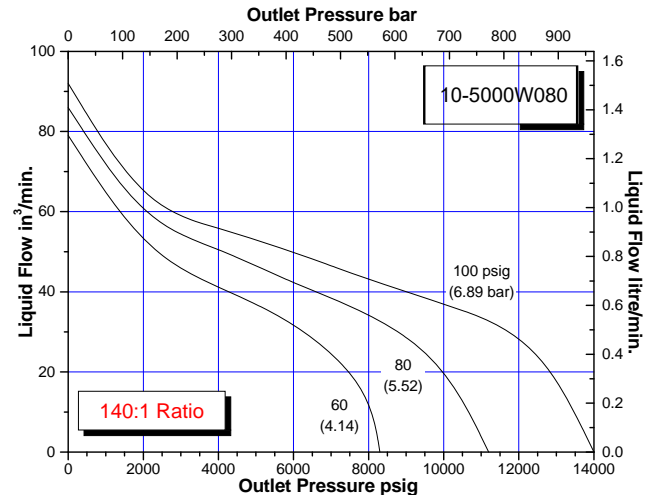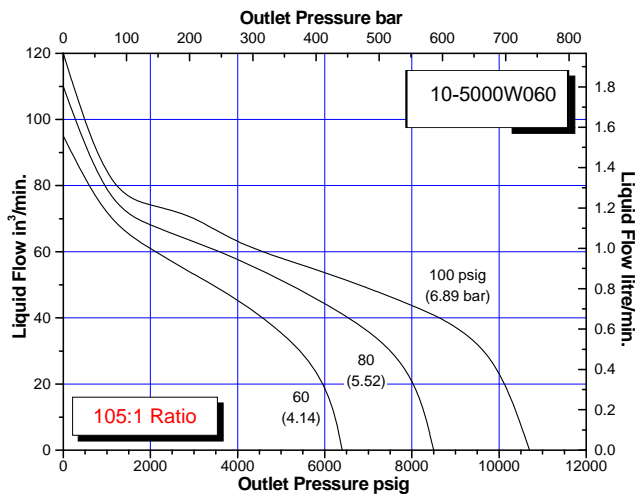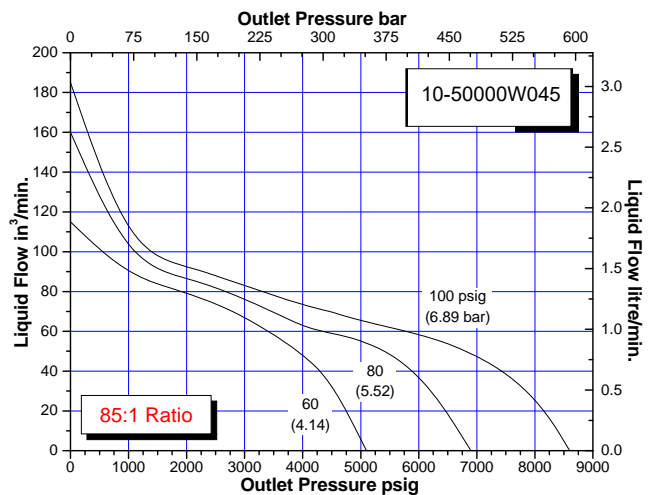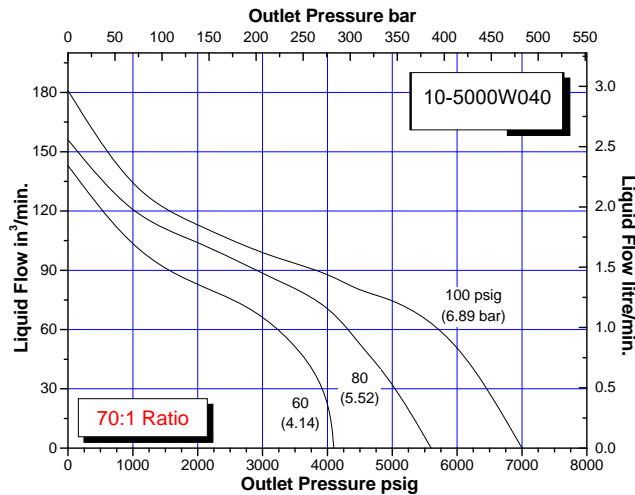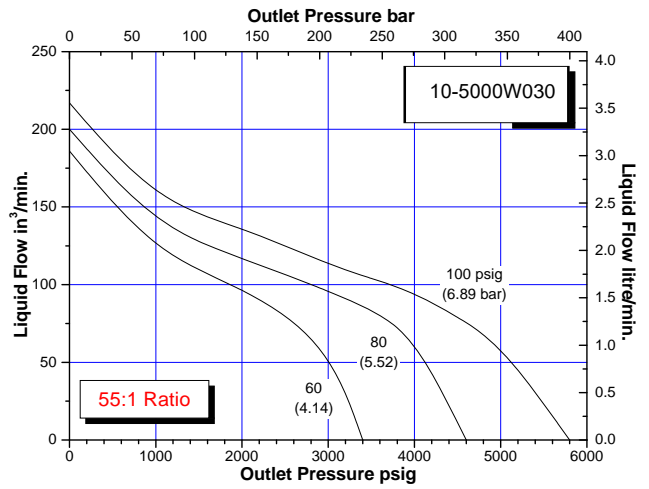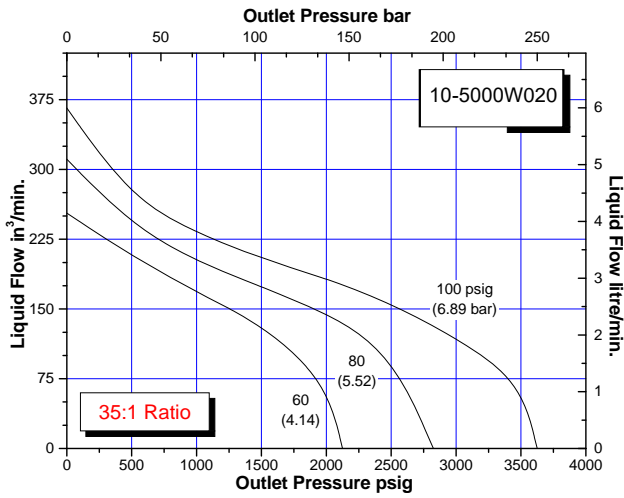

# 10-5 & 10-5L SERIES

## APPROXIMATE RATE OF DISCHARGE

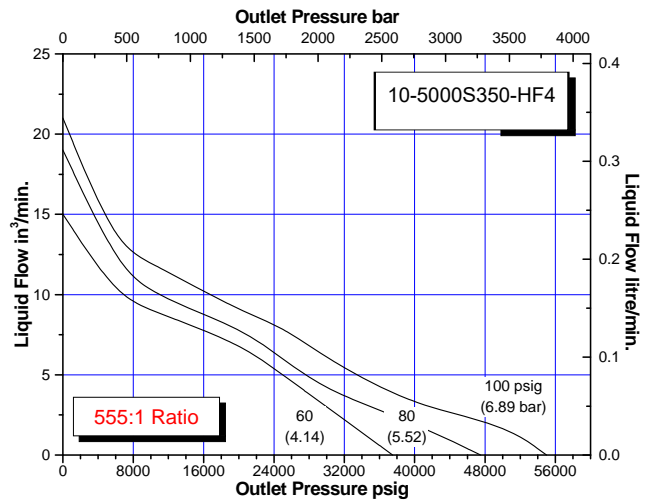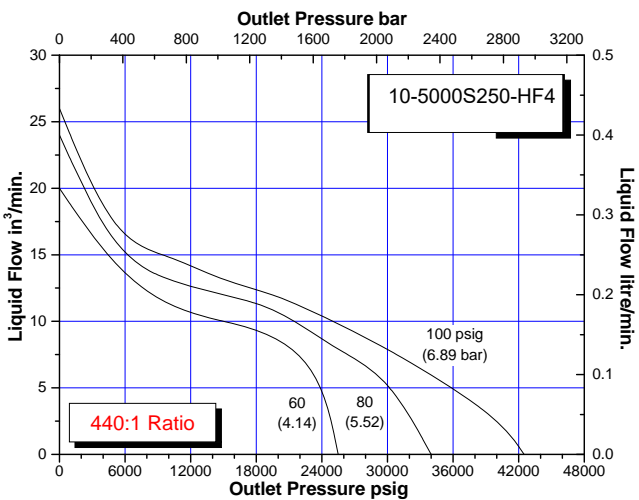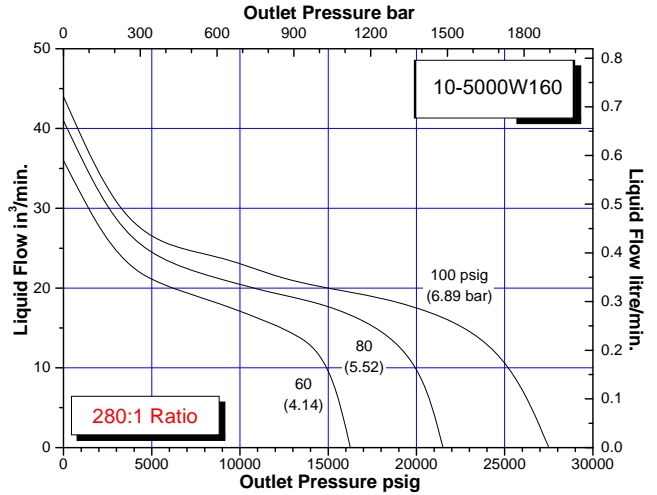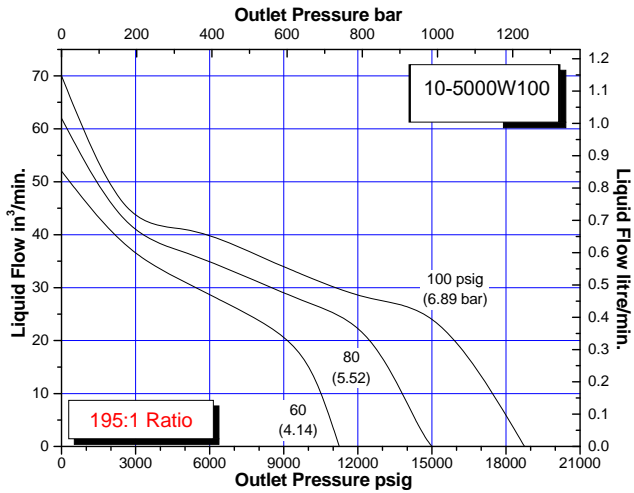


\* Recommended for continuous duty at pressure up to 30,000 psi. Intermittent duty above 30,000 psi.

# PUMP MODIFICATIONS

A combination of any of the modifications shown can be supplied upon request. Consult factory for additional information and dimensional data if required.


## **“A” Modification** – Available on all models

This modification utilizes dual seals in the hydraulic assembly with a bleed-off between the seals to atmosphere, thus providing a visual indication of hydraulic seal leakage. Used where contamination of the air motor from the hydraulic fluid being pumped is objectionable




## **”K” Modification** – Available on 10-5/10-5L and 10-6/10-6L

This modification utilizes a special air piston in the air motor assembly which decreases the stroke of the pump, thus minimizing the internal forces and increasing air motor life. Used in applications exhibiting rapid pressure losses, such as burst testing.



## **“B” Models** – Available on 10-5/10-5L and 10-6/10-6L

The “B” models have a bottom inlet connection for convenient tank top installation or alternate mounting configuration.




## **“H” Models** – Available on 10-5/10-5L and 10-6/10-6L

The “H” Models utilize special packing in the hydraulic assembly for maximum performance where hydraulic fluid media is contaminated with foreign matter, thus providing for a much greater life expectancy from the hydraulic seals than with standard o-ring seals. The “A” modification is included on all “H” models and the check valves have PTFE o-rings


## **“C” Models** – Available on 10-5/10-5L and 10-6/10-6L

The “C” Models utilize PTFE chevron packing in the hydraulic assembly for ultimate performance when other packing material is not compatible with the fluid used or because of extreme temperature conditions. The “A” modification is included on all “C” models and the check valves have PTFE o-rings.



**“R” Modification** – Available on 10-5/10-5L and 10-6/10-6L. The “R” Models are furnished with an isolator attachment which prevents the hydraulic piston retracting into the air motor during operation, thus providing for 100% non-contamination of the hydraulic assembly from the air motor. The isolator also acts as a heat barrier.

# Liquid Pump Cut-a-way

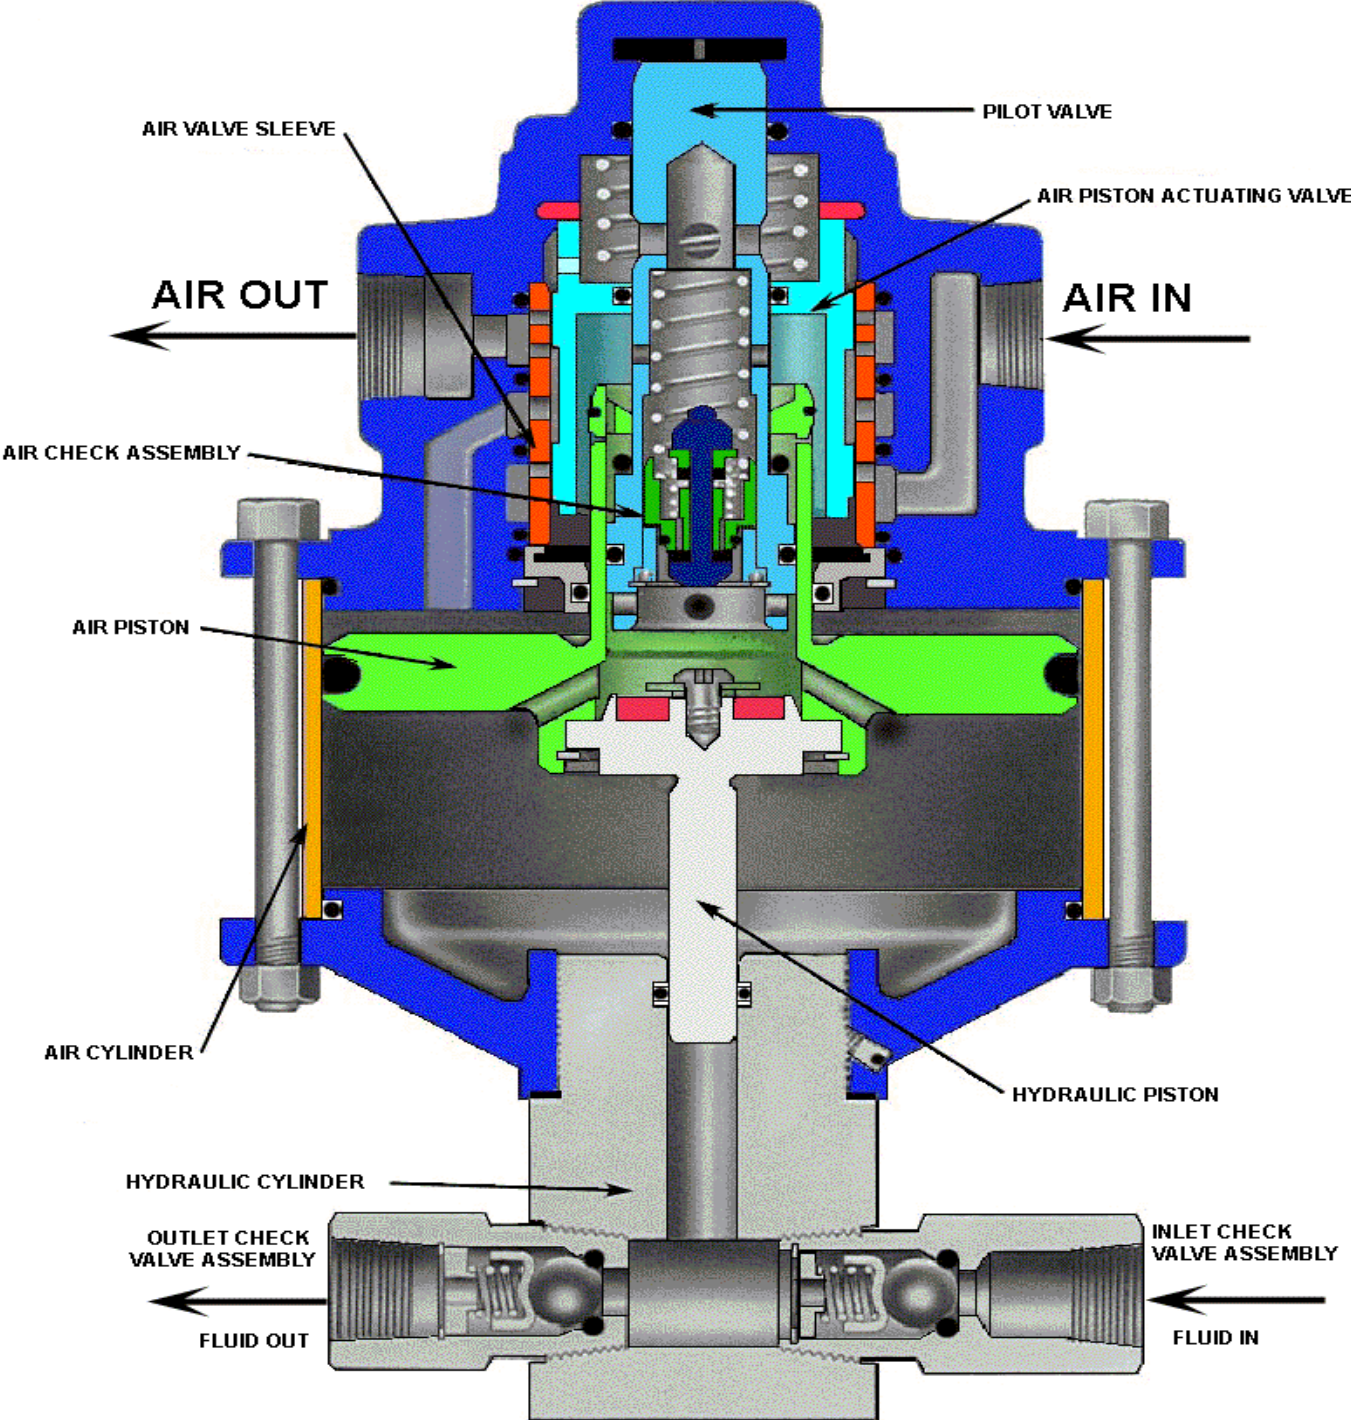



## LIMITED WARRANTY


SC manufactured products are warranted free of original defects in material and workmanship for a period of one year from date of purchase to first user. This warranty does not include packing, seals or failures caused by lack of proper maintenance, incompatible fluids, foreign materials in the air media, in the fluid media or application of pressures beyond catalog ratings. Products believed to be originally defective may be returned, freight prepaid, for repair and/or replacement to the distributor, authorized service representative or to the factory. If upon inspection by the factory or authorized service representative and the problem is found to be originally defective material or workmanship, repair or replacement will be made at no charge for labor and materials, F.O.B. the point of repair or replacement. Permission to return under warranty should be requested prior to shipment. A Return Material Authorization Number (RMA), the original purchase date, purchase order number, serial number, model number, reason for return or other pertinent data to establish warranty claim must be included in the documentation to expedite the return or replacement to the owner.

If the unit has been disassembled, misused, or altered without prior **written** authorization, warranty is void. If it has been improperly reassembled or substitute parts have been used in place of factory manufactured parts, warranty is void.

Any modification to any SC product which you have made or may make in the future will void warranty. SC disclaims any and all liability obligation, or responsibility for the modified product, and for any claims, demands or causes of action for damage or for personal injuries resulting from the modification and/or use of such a modified SC product.

**SC's obligation with respect to its products shall be limited to replacement, and in no event shall SC be liable for any loss or damage, consequential or special, of whatever kind or nature, or any other expense which may arise in connection with or as a result of such products or the use or incorporation thereof in a job. This warranty is expressly made in lieu of all other warranties of merchantability and fitness for a particular purpose. No express warranty and no implied warranties whether of merchantability or fitness for a particular purpose or otherwise, other than those expressly set forth above, shall apply to SC products.**

**HIGH PRESSURE SYSTEMS, HOSES, VALVES, GAUGES, PUMPS,  
FITTINGS, ADAPTERS AND MORE**  
**BUY IT ON OUR ONLINE STORE !**

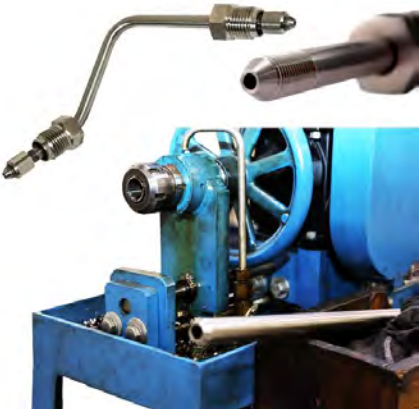

**HIGH PRESSURE TUBE SERVICES**

Bending, Cone & Tread your high pressure tubing lines needs. (hydro test bay, tubing kits, HPU's panels) Custom and build Your high pressure tubing system

