




## TECHNICAL DATA SHEET

PRODUCT	<b>HYDROSTATIC TEST EQUIPMENT</b>
MODEL	<b>U7-109REX</b>
SERIES	<b>SERIE U7-REX</b>

Pneumatic operation with stainless liquid tank, lightweight portable, compact, economic, safe, durable and easy to operate. Made in USA with highest quality components for low operational cost. U7-109REX equipment is available for use on a wide range of fluids including water, oil/hydraulic and other solubles. U7-109REX are used in most industries including Oil & Gas.

### FEATURES/BENEFITS

- Designed for easy maintenance
- Air-Drive liquids pump (SC-Hydraulic Engineering)
- All tubing and fittings are stainless steel 316
- Ports: Air supply 1/4" FNPT, discharge 1/2" FNPT, return to tank 1/4" FNPT.
- CS Frame - Unit weight: 60 pounds - Dimensions: L21" x W16" x H19"

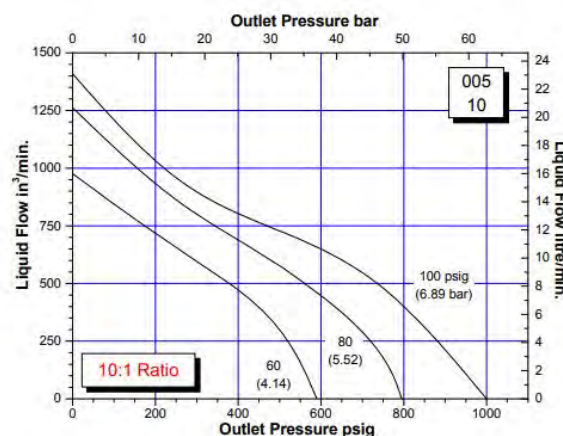

### SPECIFICATIONS

Output Flow	2.38 GPM (9 LPM)
Max Output Pressure	1000 psi (70 bar)
Air Supply	100 Psi
Tank	Stainless 4 Gallons (15 liters)
Outlet	1/2" female NPT
Pump	SC-Hydraulic Ratio 10:1

### GENERAL PRODUCT INFORMATION

- When operating from 0 to rated hydraulic pressure, air consumption will be approximately 24-56 scfm of free air at 100 psi output. At lower air pressures and higher hydraulic pressures air consumption will be reduced proportionately to flow rates indicated.
- The U7-REX Series "Dry Lube" pump does not require an air line lubricator.
- Contact Hydrorex for pressure gauges calibration / certificate.
- Maintenance parts for future repairs, all components and accessories can be found on our website [www.hydrorex.com](http://www.hydrorex.com)

