



## TECHNICAL DATA SHEET


PRODUCT	<b>HYDROSTATIC TEST EQUIPMENT</b>
MODEL	<b>U7-196REX</b>
SERIES	<b>SERIE U7-REX</b>



Pneumatic operation with stainless liquid tank. lightweight portable, compact, economic, safety, durable and easy to operate. Made in USA with highest quality components for low operational cost. U7-196REX equipment is available for use on a wide range of fluids including water, oil/hydraulic and other solubles. U7-196REX are used in most industries including Oil & Gas.

### FEATURES/BENEFITS

- Designed for easy maintenance
- Air-Drive liquids pump (SC-Hydraulic Engineering)
- All tubing and fittings are stainless steel 316
- Ports: Air supply 1/4" FNPT, discharge 3/8" MP, return to tank 1/4" F NPT.
- CS Frame - Unit weight: 60 pounds - Dimensions: : L21" x W16" x H19"

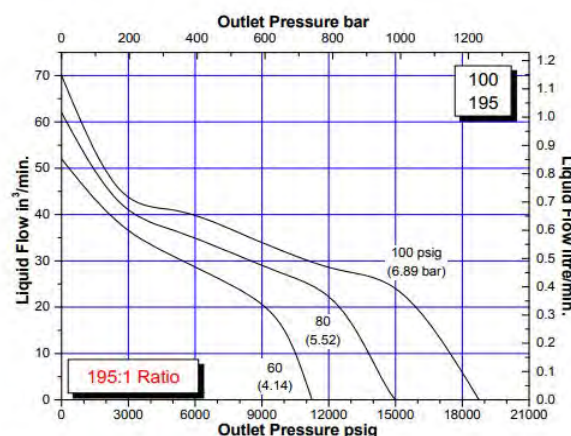

### SPECIFICATIONS

Output Flow	0.16GPM (0.60 LPM)
Max Output Pressure	19000psi (1310) bar)
Air Supply	100 Psi
Tank	Stainless 4 Gallons (15 Liters)
Outlet	3/8" female MP
Pump	SC-Hydraulic Ratio 195:1

### GENERAL PRODUCT INFORMATION

- When operating from 0 to rated hydraulic pressure, air consumption will be approximately 24-56 scfm of free air at 100 psi output. At lower air pressures and higher hydraulic pressures air consumption will be reduced proportionately to flow rates indicated.
- The U7-REX Series "Dry Lube" pump does not require an air line lubricator.
- Contact Hydrorex for pressure gauges calibration / certificate.
- Maintenance parts for future repairs, all components and accessories can be found on our website [www.hydrorex.com](http://www.hydrorex.com)