



TECHNICAL DATA SHEET


PRODUCT	HYDROSTATIC TEST EQUIPMENT
MODEL	U7-701REX
SERIES	SERIE U7-REX



Pneumatic operation with stainless liquid tank, lightweight portable, compact, economic, safety, durable and easy to operate. Made in USA with highest quality components for low operational cost. U7-701REX equipment is available for use on a wide range of fluids including water, oil/hydraulic and other solubles. U7-701REX are used in most industries including Oil & Gas.

FEATURES/BENEFITS

- Designed for easy maintenance
- Air-Drive liquids pump (SC-Hydraulic Engineering)
- All tubing and fittings are stainless steel 316
- Ports: Air supply 1/4" FNPT, discharge 1/4" FNPT, return to tank 1/4" F NPT.
- CS Frame - Unit weight: 60 pounds - Dimensions: : L21" x W16" x H19"

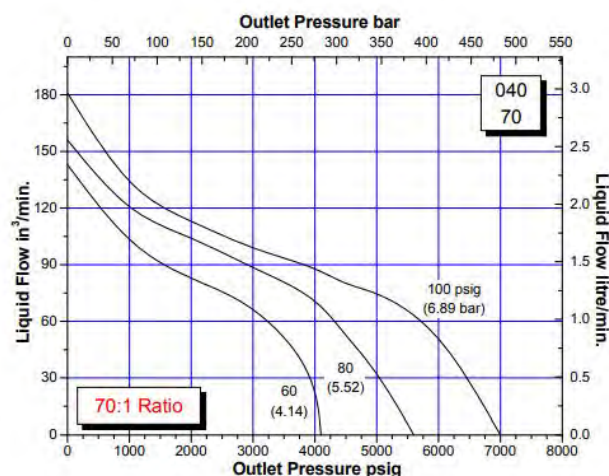

SPECIFICATIONS

Output Flow	0.40GPM (1.5 LPM)
Max Output Pressure	7000psi (480 bar)
Air Supply	100 Psi
Tank	Stainless 4 Gallons (15 liters)
Outlet	1/4" female NPT
Pump	SC-Hydraulic Ratio 70:1

GENERAL PRODUCT INFORMATION

- When operating from 0 to rated hydraulic pressure, air consumption will be approximately 24-56 scfm of free air at 100 psi output. At lower air pressures and higher hydraulic pressures air consumption will be reduced proportionately to flow rates indicated.
- The U7-REX Series "Dry Lube" pump does not require an air line lubricator.
- Contact Hydrorex for pressure gauges calibration / certificate.
- Maintenance parts for future repairs, all components and accessories can be found on our website www.hydrorex.com

