



ECONOMIC, DURABLE, SAFE & EASY TO OPERATE

- 13360 Telge Rd. #606 Cypress TX 77429
- eli@hydrorex.com
- Office: 832.277.1182



TECHNICAL DATA SHEET

PRODUCT	HYDROSTATIC & CALIBRATION
MODEL	WR-30000REX
SERIES	SERIE WR-REX
API	CERTIFIED ACCORDING TO API SPECIFICATIONS



Air operated liquid system that is lightweight portable, economic, safe, durable and easy to operate. Made in USA with highest quality components for low operational cost. Available for use on a wide range of fluids including water, oil/hydraulic and other solubles; requires 80-100 psi air drive pressure to operate. **Designed for Hydrostatic, Burst, Booster, Hydro, Injection, Leak Detector, Pressure Calibration and More.**

FEATURES/BENEFITS


- Designed for easy maintenance
- Low cost servicing
- Air operated liquid pumps
- All pressure valves, tubing, fittings & hardware are stainless 316
- Pressure Chart Recorder Port (Optional)
- Rugged case, Unit weight: 25 pounds - Dimensions: 18"x14"x8"
- HS Code: 8413.50.0050
- Certificated according to API specifications
- 8-16 SCFM

PERFORMANCE DATA

Output Flow	0.03 GPM (0.15 LPM)
Max Output Pressure	30000 psi (2869 bar)
Air Supply - Driven	80-100 Psi
Air Inlet Port	3/8" female NPT
Inlet Liquid Port	3/8" female NPT
Outlet Pressure Port	1/4" female FHP
Pump Brand & Ratio	SC-Hydraulic Ratio 300:1



FLOW CURVE RATIO 300:1

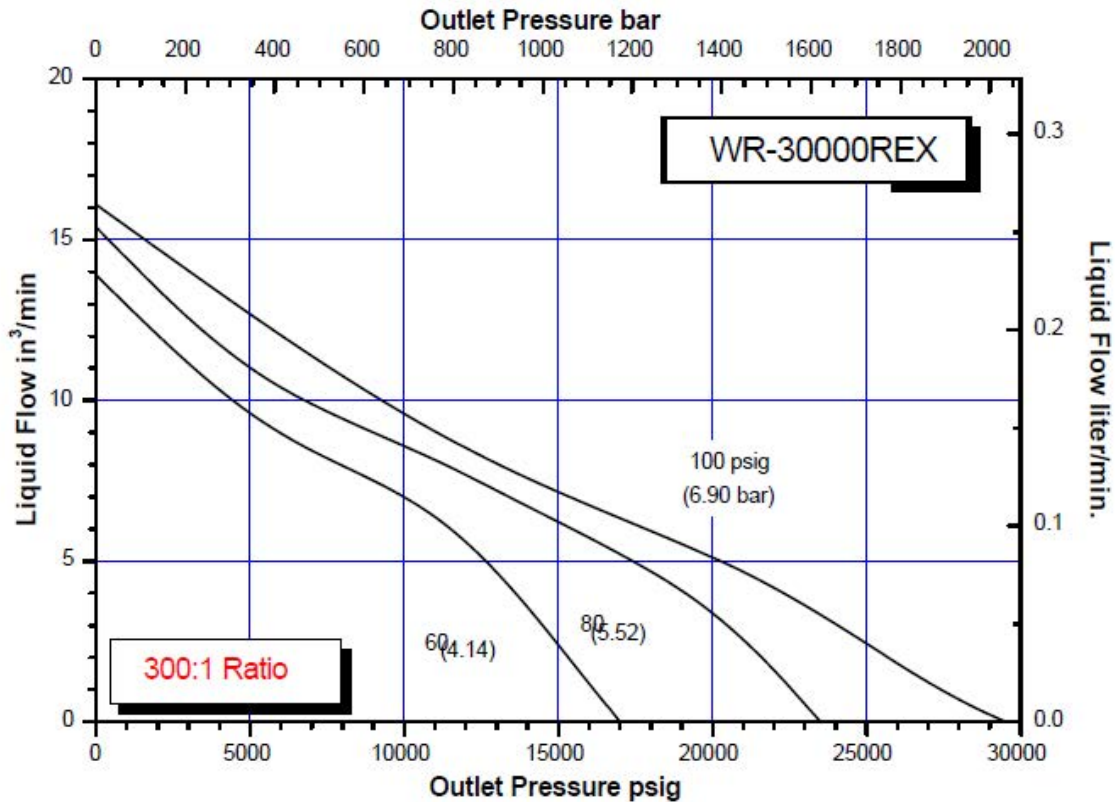

GENERAL PRODUCT INFORMATION

- When operating from 0 to rated hydraulic pressure, air consumption will be approximately **8-16 scfm** of free air at 100 psi output. At lower air pressures and higher hydraulic pressures air consumption will be reduced proportionately to flow rates indicated.
- The WR-REX Series "Dry Lube" pump does not require an air line lubricator.
- Contact Hydrorex for pressure gauges calibration / certificate.
- Maintenance parts for future repairs, all components & accessories can be found on our website www.hydrorex.com.

