





ECONOMIC, DURABLE, SAFE & EASY TO OPERATE

- 13360 Telge Rd. #606 Cypress TX 77429
- eli@hydrorex.com
- Office: 832.277.1182



TECHNICAL DATA SHEET

PRODUCT	HAND & AIR OPERATE SYSTEM
MODEL	L3-M004-125
SERIES	SERIE L3
API	CERTIFIED ACCORDING TO API SPECIFICATIONS

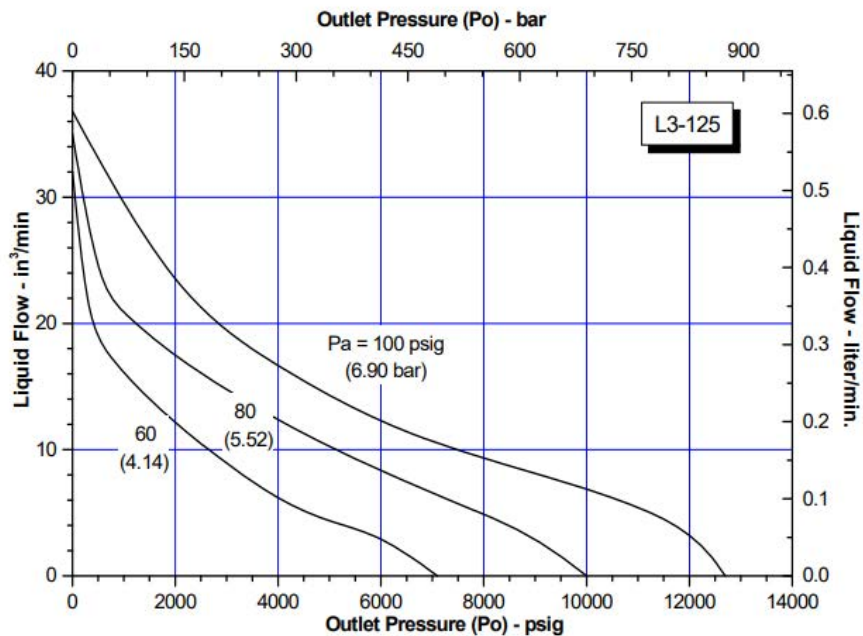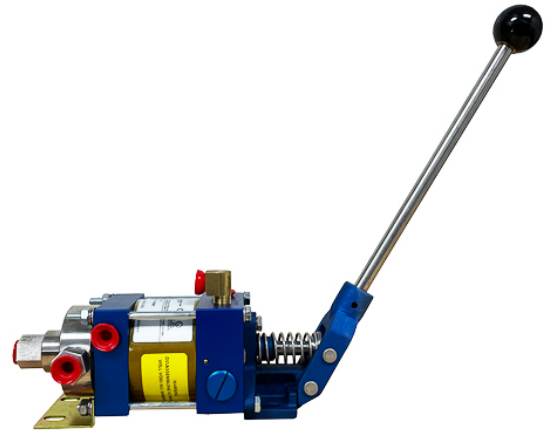

PERFORMANCE DATA

Output Flow	0.07 (0.20 LPM)
Max Output Pressure	13000 psi (896 bar)
Air Supply - Driven	60-100 Psi
Air Inlet Port	1/4" female NPT
Outlet Pressure Port	1/4" female NPT
Pump Brand & Ration	SC-Hydraulic Ratio 125:1

The L3 series pump is self priming for immediate operation. Hand pump attachment allows for manual operation when shop air is not available or for **Precision Pressure Control**. Air operated liquid system that is lightweight portable, safe, durable and easy to operate. Made in USA with highest quality components. Available for use on a wide range of fluids including water, oil/hydraulic and other solubles; requires 60-100 psi air drive pressure to operate. **Designed for Hydrostatic, Calibration, Pressure Certification, Burst, Booster, Hydro, Injection, Leak Detector, and More.**

