

ECONOMIC, DURABLE, SAFE & EASY TO OPERATE


- 13360 Telge Rd. #606 Cypress TX 77429
- eli@hydrorex.com Office: 832.277.1182



TECHNICAL DATA SHEET

PRODUCT	HAND & AIR OPERATE SYSTEM
MODEL	L3-M004-15
SERIES	SERIE L3
API	CERTIFIED ACCORDING TO API SPECIFICATIONS



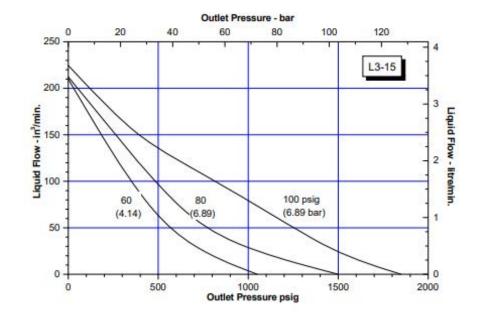

PERFORMANCE DATA

Output Flow	0.55 (2 LPM)
Max Output Pressure	1800 psi (124 bar)
Air Supply - Driven	60-100 Psi
Air Inlet Port	1/4" female NPT
Outlet Pressure Port	1/4" female NPT
Pump Brand & Ration	SC-Hydraulic Ratio 15:1

The L3 series pump is self priming for immediate operation. Hand pump attachment allows for manual operation when shop air is not available or for Precision Pressure Control. Air operated liquid system that is lightweight portable, safe, durabble and easy to operate. Made in USA with highest quality components. Available for use on a wide range of fluids including water, oil/hydraulic and other solubles; requires 60-100 psi air drive pressure to operate. Designed for Hydrostatic, Calibration, Pressure Certification, Burst, Booster, Hydro, Injection, Leak Detector, and More.







