



ECONOMIC, DURABLE, SAFE & EASY TO OPERATE

- 13340 Telge Rd. #401 Cypress TX 77429
- eli@hydrorex.com
- Office: 832.277.1182



TECHNICAL DATA SHEET

PRODUCT	HYDROSTATIC TEST EQUIPMENT
MODEL	20-402REX
SERIES	SERIE 20-REX
API	CERTIFICATED ACCORDINT TO THE API



Air operated liquid system, lightweight portable, economic, safety, durable and easy to operate. Made in USA with highest quality components for low operational cost. Available for use on a wide range of fluids including water, oil/ hydraulic and other solubles, requires 80-100 psi air drive pressure to operate. **Designed for Hydrostatic, Burst, Booster, Hydro, Injection, Leak Detector, Pressure Calibration and More.**

20-REX Series are used in most industries including Oil & Gas for: Pressure on Pipes, Valves, Hoses, Vessels, Spools, etc.

FEATURES/BENEFITS


- Designed for easy maintenance
- Low cost servicing
- Air operated liquids pump
- All pressure valves, tubing, fittings & hardware are stainless 316
- Pressure Chart Recorder Port (Optional)
- Steel frame, Unit weight: 45 pounds - Dimensions: 22"L X 12"H X 12"
- HS Code: 8413.50.0050
- Certificated according to the API
- 18-24 SCFM

PERFORMANCE DATA

Output Flow	0.16 GPM (0.60 LPM)
Max Output Pressure	40000 psi (2757 bar)
Air Supply - Driven	100 Psi
Air Inlet Port	3/8" female NPT
Inlet Liquid Port	1/2" female NPT
Outlet Pressure Port	1/4" female HP
Pump Brand & Ration	SC-Hydraulic Ratio 440:1



FLOW CURVE RATIO 440:1

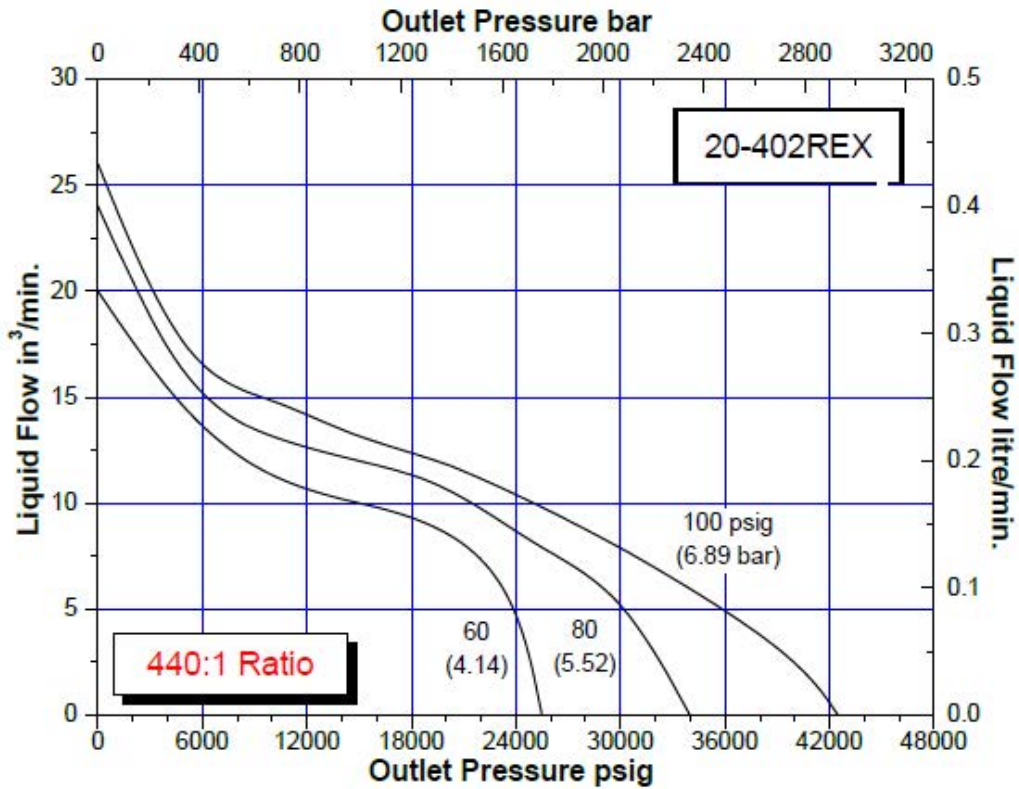

GENERAL PRODUCT INFORMATION

- When operating from 0 to rated hydraulic pressure, air consumption will be approximately **18-26 scfm** of free air at 100 psi output. At lower air pressures and higher hydraulic pressures air consumption will reduced proportionately to flow rates indicated.
- The 20REX Series "Dry Lube" pump does not require an air line lubricator.
- Contact Hydrorex for pressure gauges calibration / certificate.
- Maintenance parts for future repairs, all components & accessories can be found on our website www.hydrorex.com

