

TECHNICAL DATA SHEET


PRODUCT	HYDROSTATIC TEST EQUIPMENT
MODEL	D2-2016REX
SERIES	SERIE D2-219REX



Pneumatic operation dual pump designed for all purpose: Low, medium and high pressure with additional speedy fill-up pump that will help to suction liquids quickly from any container, reservoir, tank or any other thus filling the surface up to 150 psi before active the main pressure pump. Used to check leaks and pressure in boilers, sprinkler systems, pipes, subsea parts, pressure vessels, pressure resistance on testing with water or hydraulic and many other solubles. Most using in oil & gas industries, plants, refineries and oil rigs.

FEATURES/BENEFITS

- Designed for easy maintenance
- Made with USA highest quality components/solid rubber tires
- All tubing and fittings are stainless steel 316
- Ports: Air supply 3/8 FNPT, liquid inlet 1/2" NPT, discharge 1/2" FNPT
- Unit weight: 150 pounds Dimensions: 28" x 48" x 18" Shipping weight: 170lb

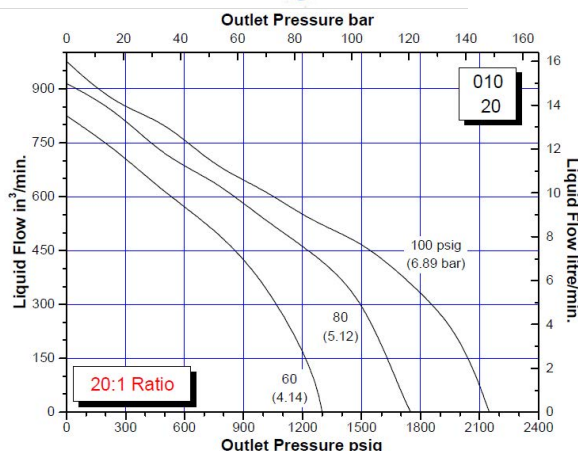

SPECIFICATIONS

FILL-UP PUMP

Output Flow	2.40 GPM (9 LPM)	Output Flow	12 GPM (45 LPM)
Max Output Pressure	2000 psi (138 bar)	Max Output Pressure	150 psi (10.5 bar)
Air Supply	100 Psi	Air Supply	60-100 Psi
Inlet	1/2 female NPT	Inlet	1/2 female NPT
Outlet	3/8 female NPT	Outlet	1/2 female NPT
Pump	SC-Hydraulic Ratio 20:1	Pump	Roughneck Double Diaphragm

PRESSURE GAUGES CALIBRATION & FUTURE MAINTENANCE

- Pressure gauges calibration & chart recorders by customer request
- Maintenance parts or future repairs, all components and accessories can be found on our website www.hydrorex.com