

INDUSTRIAL GAS BOOSTER | PROFESSIONAL

MODEL **Model C-GBD-30-REX**


SERIES **C-GBD-Series**

Single Stage - Double Acting

This series of boosters doubles the volume of output gas per cycle and is a good choice for moving relatively high volumes at pressures up to 20,000 psig. Supply pressure is added to the maximum outlet pressure. **Nitrogen, Oxygen, Argon, Helium, Hydrogen and more.**



PERFORMANCE CHART

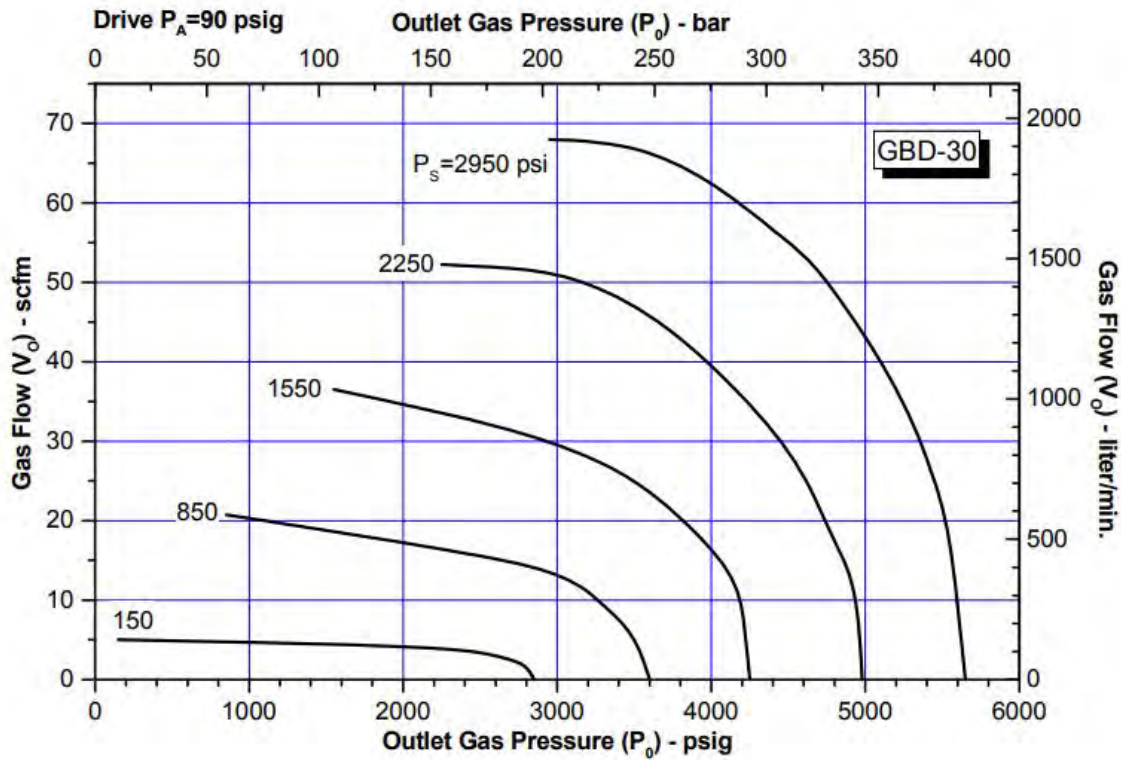

COMFORTABLE

Output Pressure	5000 (344 bar)
Gas Input	100 - 2300 Psi
Volume Per Stroke	6.3 in ³
Flow	100 - 1500 LPM
Air Operate	60 - 90 psi (6 bar)
Max. Air Consumption	24-56-scfm

MAX. RATED OPERATIONAL

Max. Output Pressure	9000 (620 bar)
Max. Gas Input	2300 - 6000 Psi
Volume Per Stroke	6.3 in ³
Flow	2000 LPM
Air Operate	100 - 120 psi (7 bar)

Refer to gas booster performance curve for operating pressures

CONSTRUCTION & GASES

Variety Gases	Nitrogen, Argon, Helium, Hydrogen and more.
Pump Brand	SC-Hydraulic Engineering
Made In	USA
Components	Parker, McDaniel, Spir Star & Swagelok
Frame	Waterproof Case (Black) + Stainless steel Control Panel
Dimensions & Weight	Shipment Weight: 160 lbs / Dimensions: 32 x 24 x 20

FEATURES

- Infinitely variable output pressure and flow
- Will hold static pressure without generating heat or consuming power
- Standard models are suitable for various gases
- Well proven and trouble-free operation
- Designed for ease of maintenance
- Low cost servicing
- Robust construction

CONNECTIONS

Gas Inlet	1/4" NPT Female
Gas Outlet	1/4" NPT Female
Air Inlet	1/2" NPT Female
Bleed	1/4" NPT Female

PUMP ON MODEL GB-REX - DRAWING

