
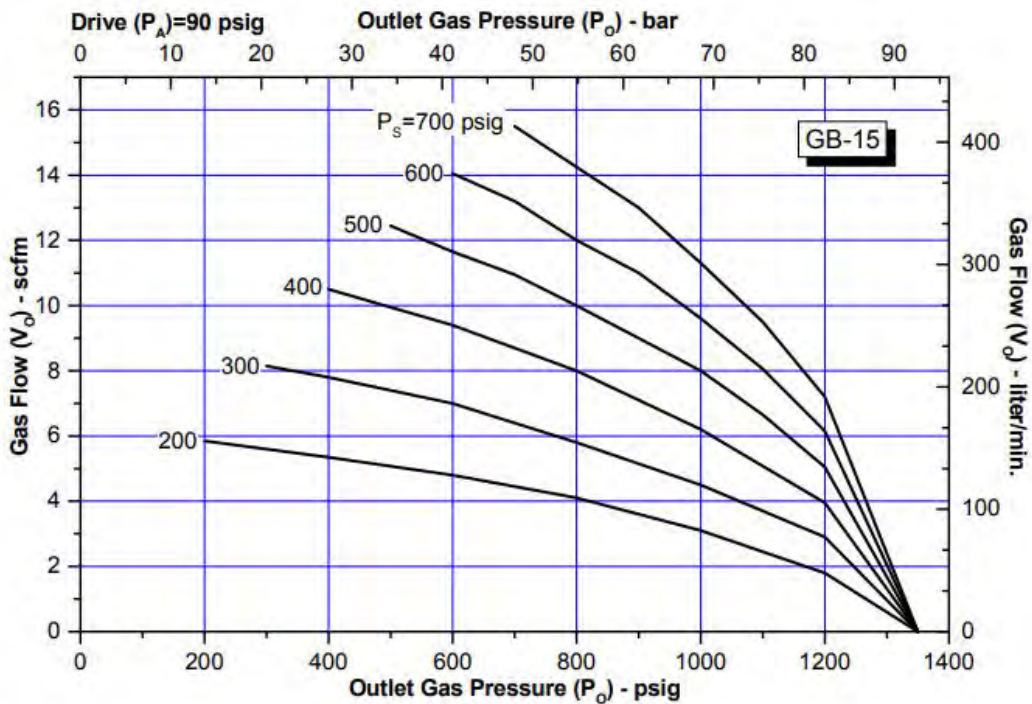


INDUSTRIAL GAS BOOSTER | PROFESSIONAL

MODEL	Model GB-15-REX	
SERIES	GB-Series Single Stage - Single Acting The most economical and ideal for applications not requiring much volume. Nitrogen, Oxygen, Argon, Helium, Hydrogen and more.	

PERFORMANCE CHART



COMFORTABLE		MAX. RATED OPERATIONAL	
Output Pressure	1300 (89 bar)	Max. Output Pressure	2250 (155 bar)
Gas Input	50 - 700 Psi	Max. Gas Input	700 - 2250 Psi
Volume Per Stroke	7.5 in ³	Volume Per Stroke	7.5 in ³
Flow	100 - 400 LPM	Flow	400 LPM
Air Operate	60 - 90 psi (6 bar)	Air Operate	100 - 120 psi (7 bar)
Max. Air Consumption	24-56-scfm		

Refer to gas booster performance curve for operating pressures

CONSTRUCTION & GASES

Variety Gases	Nitrogen, Oxygen, Argon, Helium, Hydrogen and more.
Pump Brand	SC-Hydraulic Engineering
Made In	USA
Components	Parker, McDaniel, Spir Star & Swagelok
Frame	Steel painted frame (Painted Blue) + Stainless steel Control Panel
Dimensions & Weight	22" L x 17" H x 13"W - 90 lbs

FEATURES

- Infinitely variable output pressure and flow
- Will hold static pressure without generating heat or consuming power
- Standard models are suitable for various gases
- Well proven and trouble-free operation
- Designed for ease of maintenance
- Low cost servicing
- Robust construction

CONNECTIONS

Gas Inlet	1/4" NPT Female
Gas Outlet	1/4" NPT Female
Air Inlet	1/2" NPT Female
Bleed	1/4" NPT Female

PUMP ON MODEL GB-REX - DRAWING

