




INDUSTRIAL GAS BOOSTER | PROFESSIONAL

MODEL	Model SS-GBT-D30/75-REX
SERIES	<p>GBT-D Series</p> <p>Two Stage- Double Head</p> <p>Has same characteristics of the standard GBT however the double allows half the input pressure to achieve same outlet pressure</p> <p>Nitrogen, Oxygen, Argon, Helium, Hydrogen and more.</p>



PERFORMANCE CHART

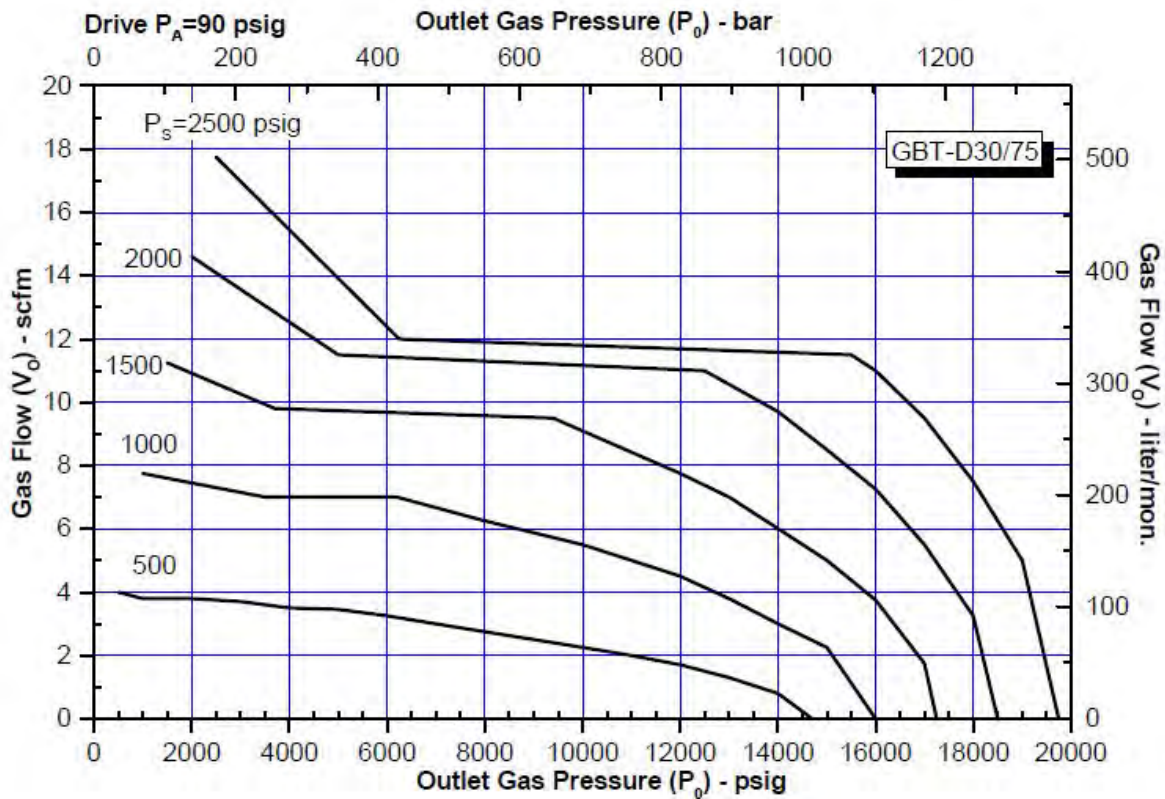

COMFORTABLE

MAX. RATED OPERATIONAL

Output Pressure	20,000 Psi (1378 Bar)	Max. Output Pressure	25,000 Psi (1723 Bar)
Gas Input	500 - 2500 Psi	Max. Gas Input	2500 -3600 Psi
Volume Per Stroke	3.1 in ³	Volume Per Stroke	3.1 in ³
Flow	100 - 500 LPM	Flow	700 LPM
Air Operate	80 - 100 psi (7 bar)	Air Operate	100 - 120 psi (7 bar)
Max. Air Consumption	24-56-scfm		

Refer to gas booster performance curve for operating pressures

CONSTRUCTION & GASES

Variety Gases	Nitrogen, Oxygen, Argon, Helium, Hydrogen and more.
Pump Brand	SC-Hydraulic Engineering
Made In	USA
Components	Parker, McDaniel, Spir Star & Swagelok
Frame	All Stainless
Dimensions & Weight	38" L X 16" W X 20"H - Weight 130 lbs

FEATURES

- Infinitely variable output pressure and flow
- Will hold static pressure without generating heat or consuming power
- Standard models are suitable for various gases
- Well proven and trouble-free operation
- Designed for ease of maintenance
- Low cost servicing
- Robust construction
- Made in USA

CONNECTIONS

Gas Inlet	1/4" NPT Female
Gas Outlet	3/8" MP Female (adapter converter to 1/4 FNPT included)
Air Inlet	1/2" NPT Female
Bleed	1/4" NPT Female

PUMP ON MODEL SS-GBT-D DRAWING

