



ECONOMIC, DURABLE, SAFE & EASY TO OPERATE

- 13340 Telge Rd. Ste. 401 Cypress TX 77429
- eli@hydrorex.com
- Office: 832.277.1182



TECHNICAL DATA SHEET

PRODUCT	DIGITAL HYDROSTATIC TEST UNIT
MODEL	10D-2016REX
SERIES	SERIE 10D-REX
API	CERTIFIED ACCORDING TO API SPECIFICATIONS



Digital hydrostatic pressure test unit is the most common standard testing equipment with digital pressure and temperature graph chart recorder with a 0.15% accuracy. Air operated liquid pressure pump with a variety of models on pressure that ranges from 500 PSI to 65,000 PSI, with several flow rates.

Designed for Hydrostatic, Burst, Booster, Hydro, Injection, Leak Detector, Pressure Calibration and More.

10D-REX Series are used in most industries including Oil & Gas for: Pressure & Certifications on Pipes, Valves, Hoses, Vessels, Spools, Instrumentation controls, etc.

FEATURES/BENEFITS

- Creates customized pressure test reports and certificates.
- Weatherproof touchscreen panel PC in 12 inch mount on stainless control panel.
- Real-time pressure & temperature monitoring and reporting.
- Air operated liquid pump (60-100 Psi driven) 24-56 SCFM
- All Stainless anticorrosive (Structure and all components)
- ESI technologies usb transducer & software
- Made in USA
- Unit weight: 125 pounds - Dimensions: 28"L X 20" W 26"H
- HS Code: 8413.50.0000
- Certificated according to API specifications
- For use with all liquids: Water, hydraulics, oils, glycol, etc.

PERFORMANCE DATA

Output Flow	4.22 GPM (16 LPM)
Max Output Pressure	2000 psi (138 bar)
Air Supply - Driven	60-100 Psi (24-56 SCFM)
Air Inlet Port	1/2" female NPT
Inlet Liquid Port	1/2" female NPT
Outlet Pressure Port	1/2" female NPT
Bleed Port	1/4" female NPT
Pump Brand & Ration	SC-Hydraulic Ratio 20:1
Temperature	Recommended: 200°F (Max. 400°F)





DIGITAL CHART RECORDER

- Records and graphs pressure & temperature.
- USB Plug for data download/upload & easy device connection
The esi allows the user to measure up to 16 pressure and temperature inputs simultaneously and create customized test reports. ▀ Up to 5Hz – 5 Readings per Second
- Easy setup, configuration and reporting. The software interface allows for real-time pressure and temperature recording using a 12" anti-glare touchscreen tablet.
- Easy Software Interface for Real-Time Pressure & Temperature Monitoring & Reporting
- Digital test report shareable via USB and wireless
- **Multiples Languages:** English, Spanish, German, Chinese Italian, Portugues, French.
- 110 V Female Connection for standard Shop Power (220-240V to 110-120V voltage convert device available with over 150 country style plugs) EURO, Africa, UK & Asia



SPECIFICATIONS

Model 10D Recorder

Test pressure 2,100 Psi

Test pressure 145 Bar

Pressure Accuracy:
2,100 Psi 0.15%

ESI Technology Ltd
THE MANUFACTURER OF THE FOLLOWING PRODUCTS FOR CUSTOMISED PRESSURE AND TEMPERATURE TRANSDUCERS & TRANSMITTERS

Test Certificate

Test Object Identification

Customer:	INSERT_CustomField_1	Time Hold:	INSERT_CustomField_4
Test Object:	INSERT_CustomField_2	Test Pressure:	INSERT_CustomField_5
Test Date:	INSERT_CustomField_3	Part No.:	INSERT_CustomField_6

Certification Information

Used Cal. Device:	ESI-Digital Recorder	Test Source:	INSERT_CustomField_7
Serial No.:	INSERT_Sensor1_Serial	Equip. Cal. Date:	INSERT_CustomField_8

Temperature serves as indication only

Test Technician: INSERT_CustomField_9	Signature: _____
Test Witness: _____	Signature: _____

ESI Technology Ltd, Digital Pressure & Temperature Chart Recorders
www.esitech.com - Made in USA

Page 1 of 2


DIGITAL TEMPERATURE

Other Pressure Ranges:	PSI, bar, mBar, MPa, Pa, mH2O, mmHg, atm, kg/cm2, kPa
Accuracy NLHR:	≤ ± 0.15% of span BFSL
Temperature Ranges:	°F or °C
Operating Ambient Temperature:	32°F to +115°F
Storage Temperature:	-4°F to +140°F
Temperature Effects:	±1.5 %FS total error band for -14°F to +176°F. Typical thermal zero and span coefficients ±0.015 %FS/ °C

OPTIONAL

- Multiple pressure inlets/sensors for best accuracy pressure
- Double acting pumps
- Multiples test stations
- All covers (test gabinet style)
- Pump for liquid or gases
- With small test chamber
- With liquid tank
- With stand (standard operation height)
- Dual pumps for high and low
- Custom paint color.

FLOW CURVE RATIO 20:1

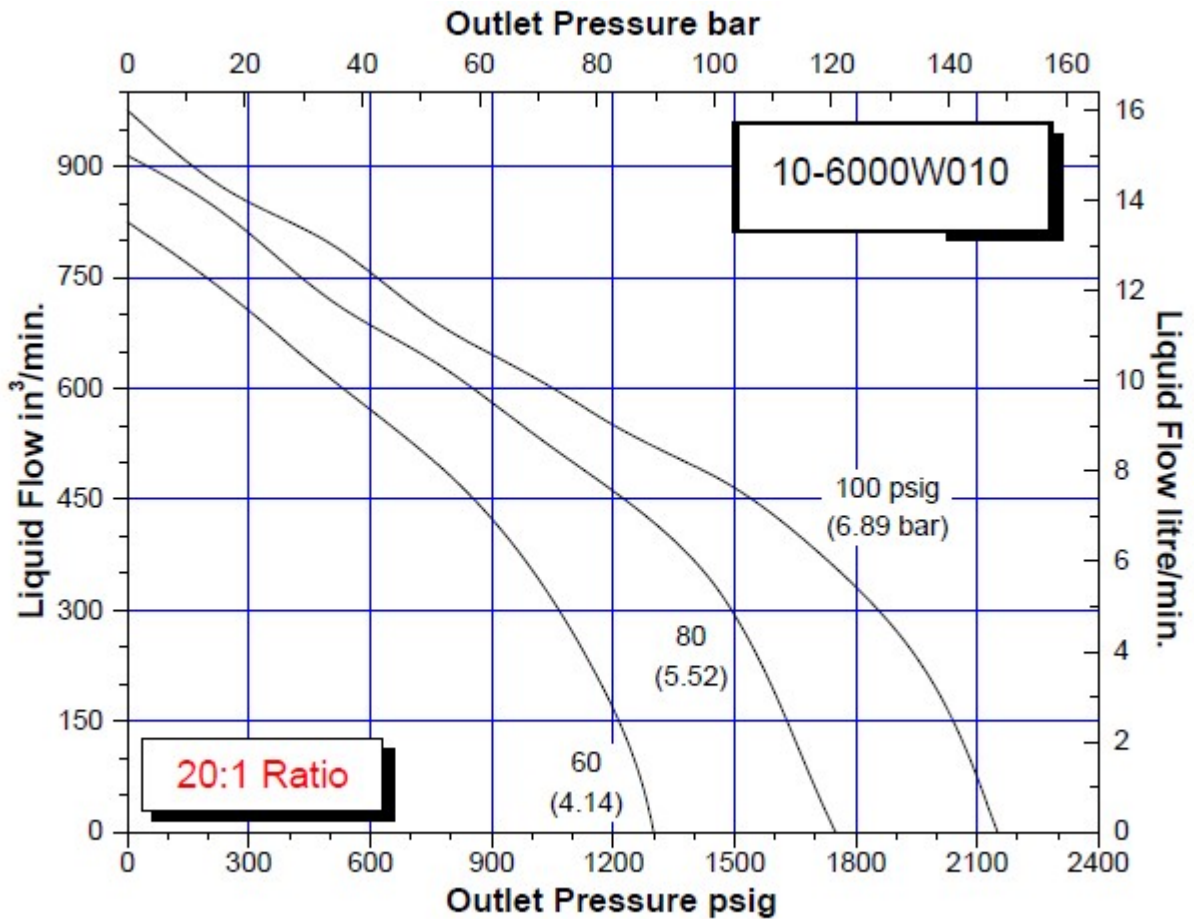

GENERAL PRODUCT INFORMATION

- When operating from 0 to rated hydraulic pressure, air consumption will be approximately **24-56 scfm** of free air at 100 psi output. At lower air pressures and higher hydraulic pressures air consumption will be reduced proportionately to flow rates indicated.
- The 10D-REX Series "Dry Lube" pump does not require an air line lubricator.
- Contact Hydrorex for pressure gauges calibration / certificate.
- Maintenance parts for future repairs, all components & accessories can be found on our website www.hydrorex.com.

